

**Step A-** Remove standard ceiling clamp from trim (See Step B for removal)



**Step B-** Push nut must be removed from clamp retaining screw with a flathead screwdriver or alternative tool (not provided)



**Step C-** After push nut has been removed, clamp retaining screw and standard clamp can be removed from trim.



**Step D-** Closeup of new Extended Ceiling Clamp for thicker ceilings. Replaces standard clamps only when ceiling thickness is too thick for standard ceiling clamps.




**Step E-** Align hole of new ceiling clamp with trim so screw can go thru to other side of trim.



**Step F-** Thread clamp retaining screw completely to the end of the trim.



**Step G-** Add new locking nut

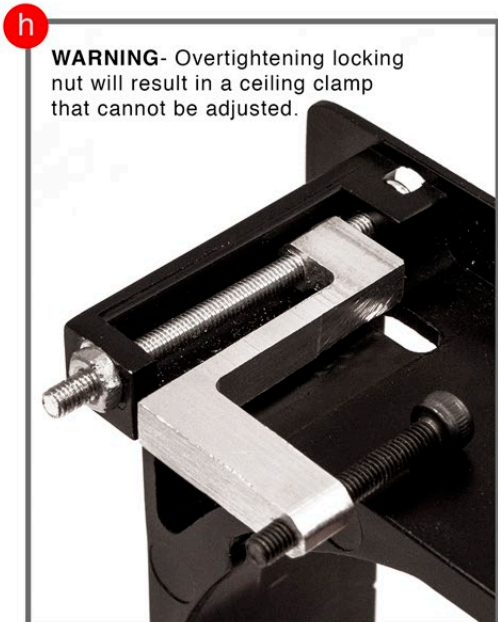

**Step H-** Tighten locking nut, but do not overtighten

**WARNING-** Overtightening locking nut will result in a ceiling clamp that cannot be adjusted.



**Extended Ceiling Clamp  
for up to 2"  
Ceiling thickness**

**Part # GR-TEX2**

