






Step 1- Exposed Ceiling Joists

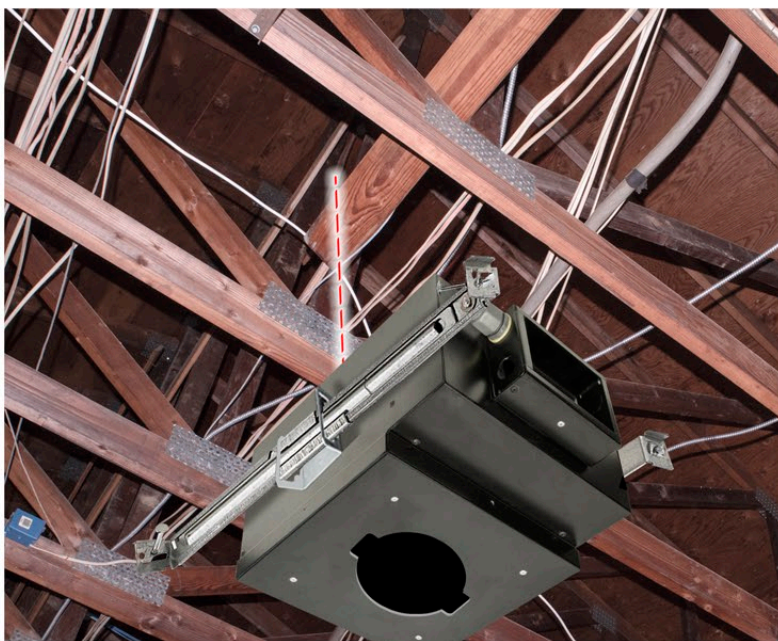


Step 2- Adjustable Mounting Rails anchor housing to ceiling joists with screws

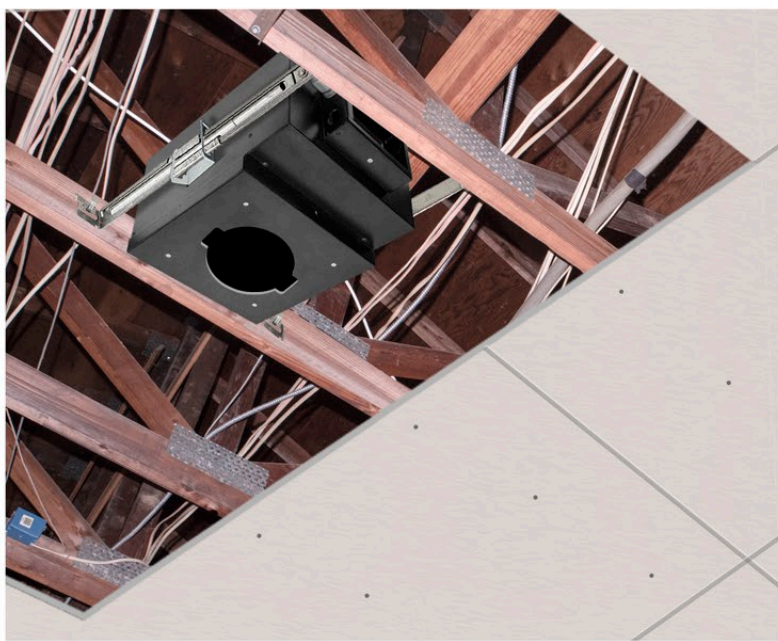


Step 3- After housing is secured. Continue GWB ceiling install.

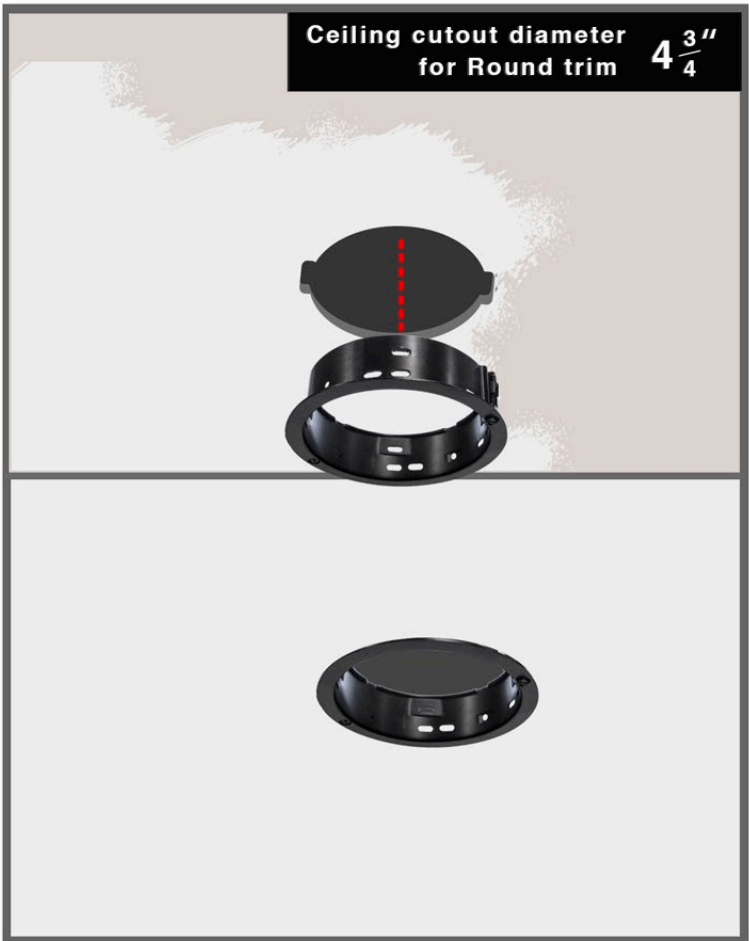

Step 4a- Apply tape & joint compound
Step 4b- Cutout opening. Paint GWB Ceiling.
Step 4c- Install receiver with GWB Screws.

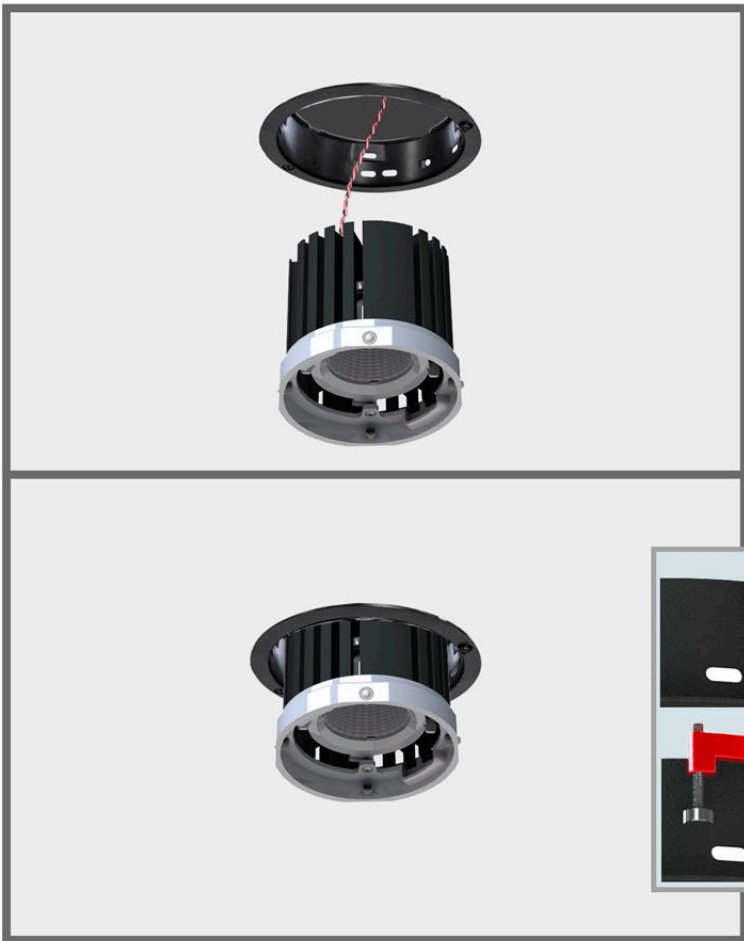

Step E- Finalize electrical wiring/connections. Then slide light assembly into receiver.
Step F- Ball plungers(4) on light assembly clicks into 4 slots on receiver.

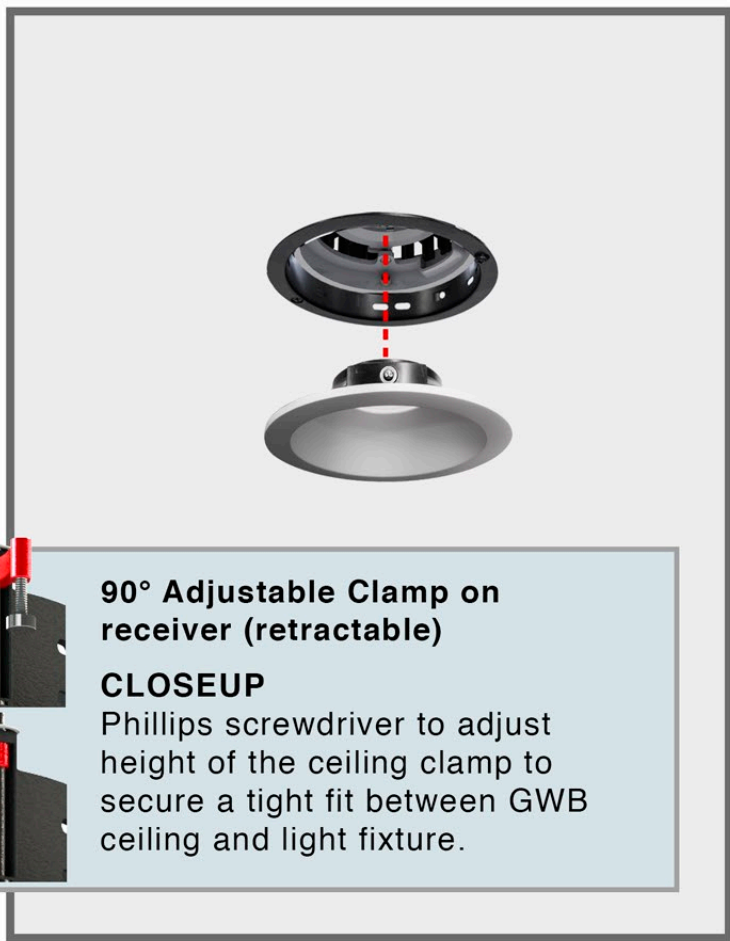

Step G- After light assembly locks into the flanged receiver, slide & lock flanged trim into the receiver.



Repeat process for all GR-Round Flanged

How to secure with safety cables?



IC Rated Flanged Round Trim w/Housing
Instruction Sheet for
GRF, GR, GRO, GRW Series

