

Light efficiency:




Output: 916 lm

Light quality:




Peak: 3540 cd

Power: 14.7 W

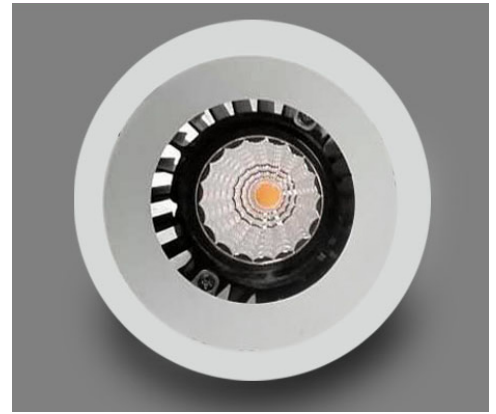

Beam angle

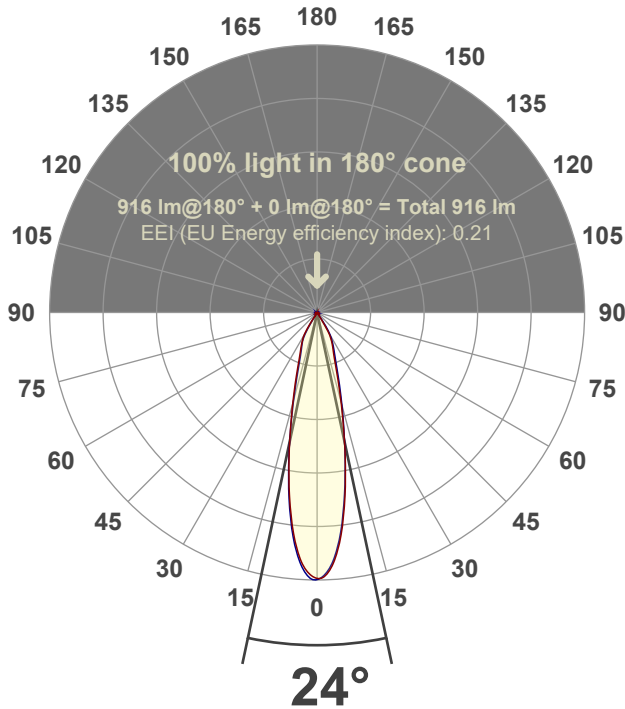

Test number:

GR-O-F-A14-3019-NF-RD-Rev2

Luminaire Model:

Graffiti Open Round Fixed Downlight-A14-3019 24° Optic


Date and time:

3/24/2022 9:29:21 PM


Delivered Lumens

916

Spectra

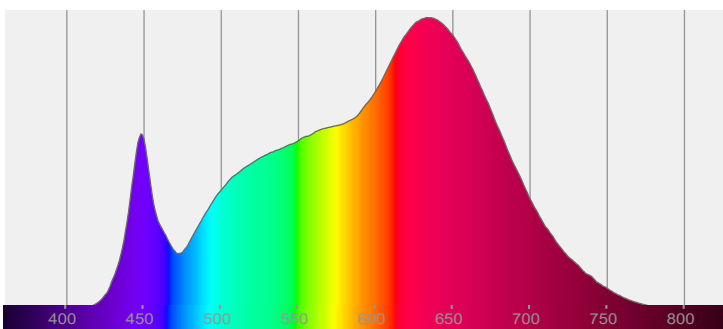

CRI: 94.9 (R1-R8)

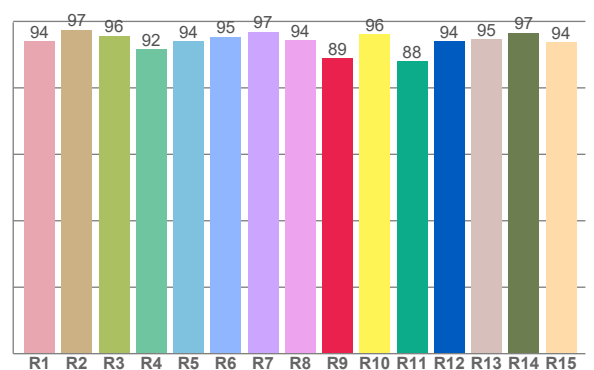

Color parameters


	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	94.9	88.9	94.7	105.6	94.9	0.422	0.388	0.248	0.342	-0.0044

R_f 94.7
Fidelity index R_f


R_g 105.6
Gammut index R_g

TM30: 94.7



TM-30Color

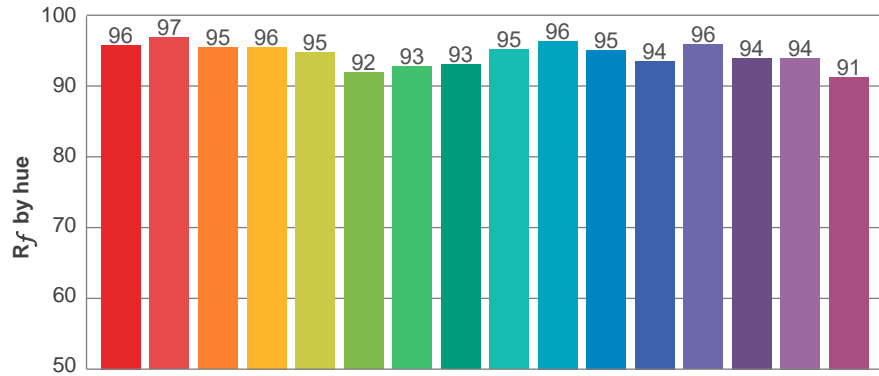



Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	96	1%	-1%
2	97	1%	0%
3	95	2%	1%
4	96	2%	1%
5	95	2%	2%
6	92	5%	1%
7	93	4%	-1%
8	93	4%	-3%
9	95	2%	-2%
10	96	0%	-2%
11	95	1%	2%
12	94	4%	1%
13	96	3%	-1%
14	94	5%	-1%
15	94	3%	-1%
16	91	4%	-6%

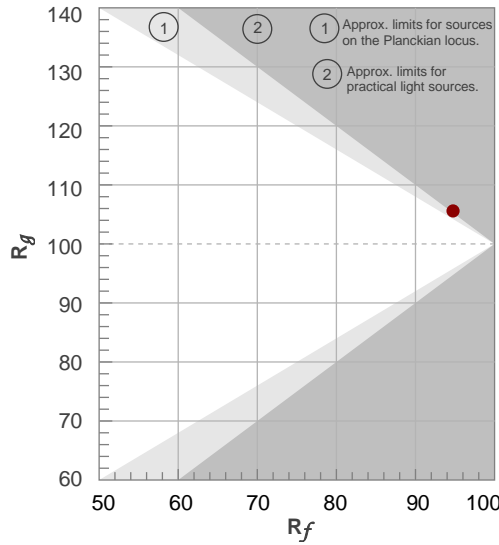


Color vector graphics

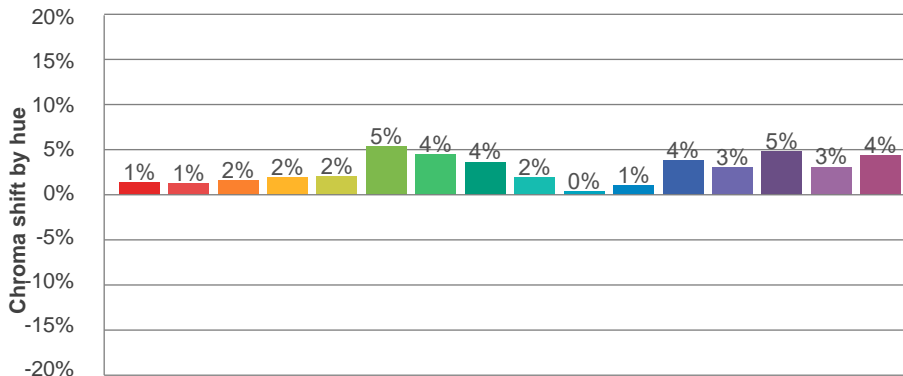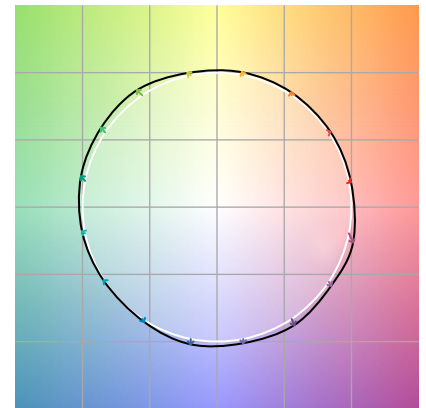

Color distortion

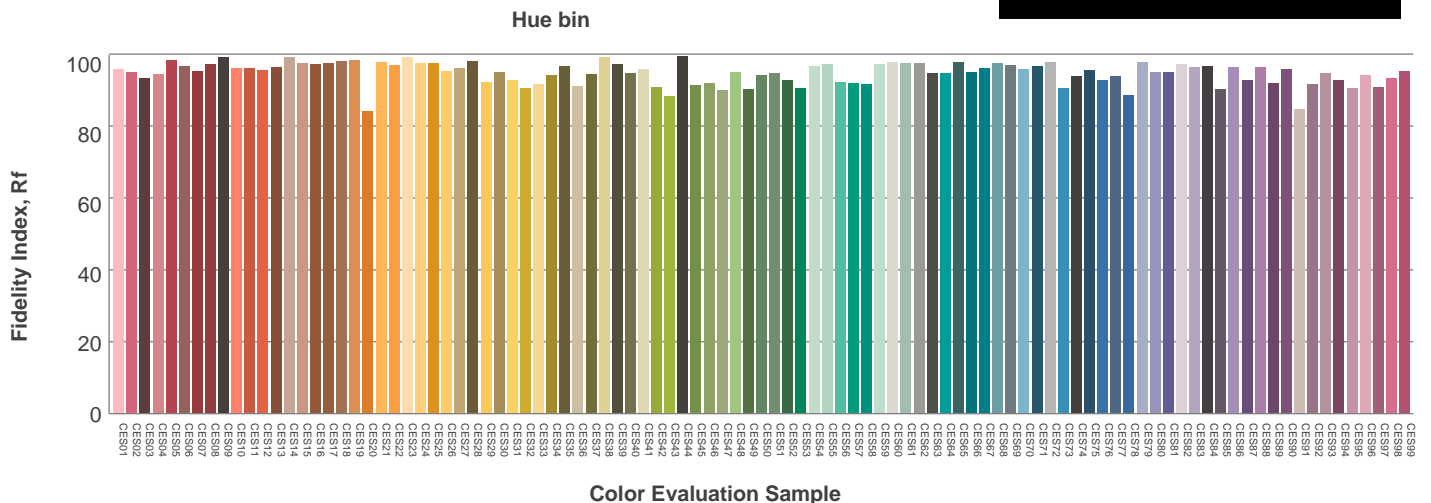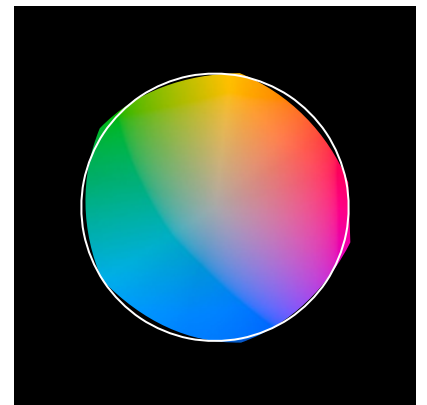

Beam details

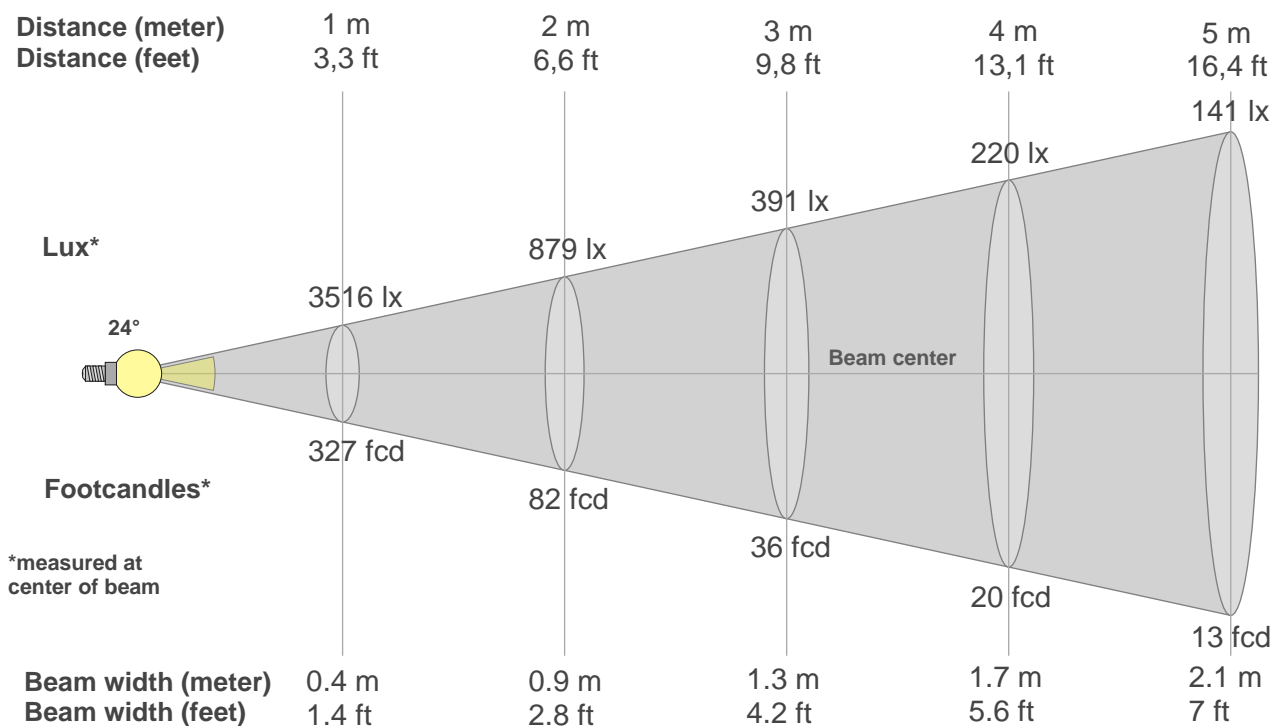

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3516lx	879lx	391lx	220lx	141lx	98lx	72lx	55lx	43lx	35lx	29lx	24lx	21lx	18lx	16lx	14lx	12lx	11lx	10lx	9lx
326.6fcd	81.7fcd	36.3fcd	20.4fcd	13.1fcd	9.1fcd	6.7fcd	5.1fcd	4fcd	3.3fcd	2.7fcd	2.3fcd	1.9fcd	1.7fcd	1.5fcd	1.3fcd	1.1fcd	1fcd	0.9fcd	0.8fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3516	3465	3293	2995	2599	2179	1769	1399	1096	871	707	595	518	456	390	310	187	72	12	8
100%	99%	94%	85%	74%	62%	50%	40%	31%	25%	20%	17%	15%	13%	11%	9%	5%	2%	0%	0%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3516	3443	3258	2954	2560	2153	1769	1431	1150	934	769	648	560	491	425	358	268	152	40	6
100%	98%	93%	84%	73%	61%	50%	41%	33%	27%	22%	18%	16%	14%	12%	10%	8%	4%	1%	0%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3516	3436	3261	2965	2578	2167	1768	1413	1123	908	744	625	541	475	414	351	243	118	22	5
100%	98%	93%	84%	73%	62%	50%	40%	32%	26%	21%	18%	15%	14%	12%	10%	7%	3%	1%	0%


Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3516	3481	3308	3013	2618	2191	1769	1384	1069	847	689	582	508	450	393	286	150	46	8	7
100%	99%	94%	86%	74%	62%	50%	39%	30%	24%	20%	17%	14%	13%	11%	8%	4%	1%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
24°	58.9°	67.9°	99.3%	99.0%

LAMPS (number of lamps)
50

Light planning Luminaire budgetary diagram

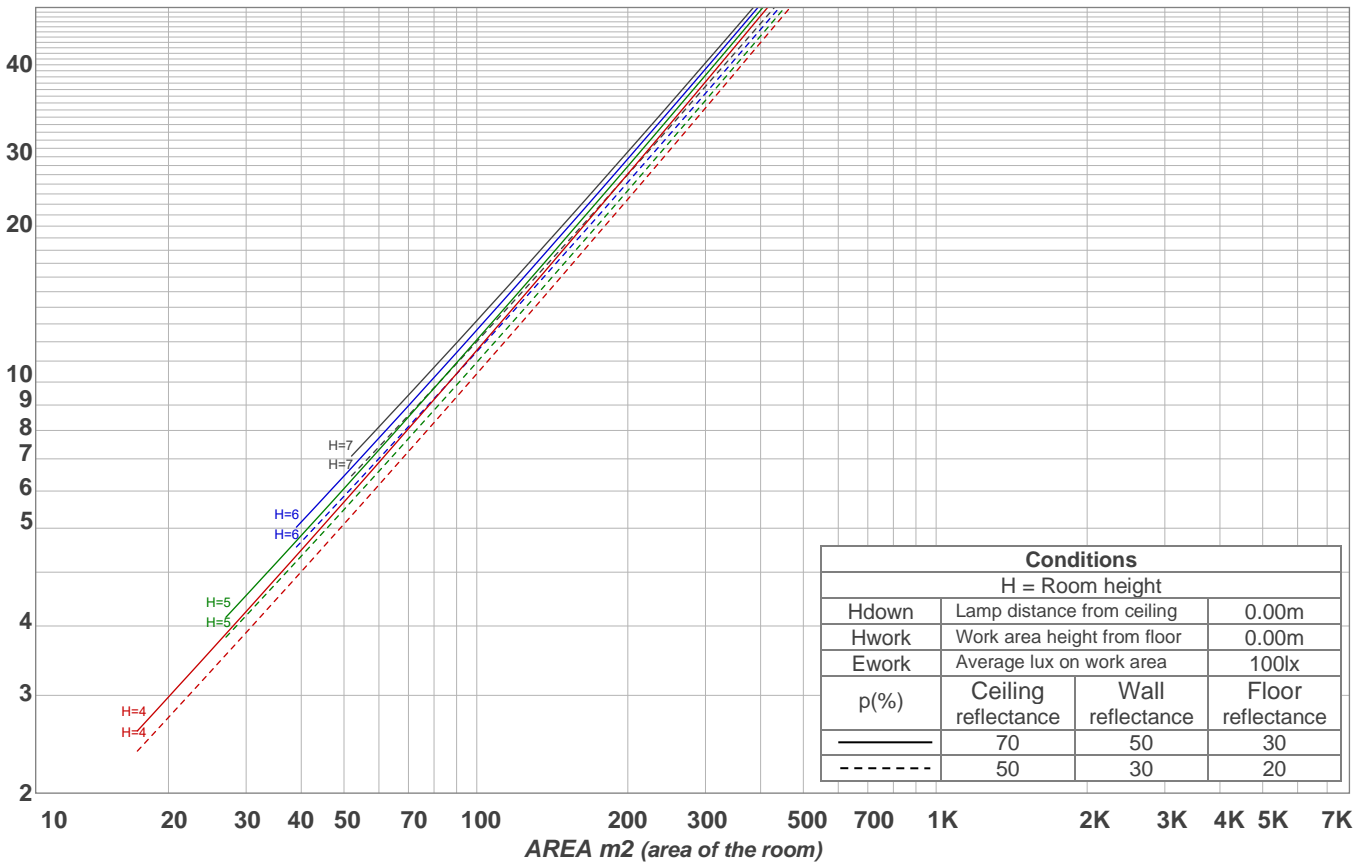

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	102	101	100	99	98	97	96
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92
3	106	101	97	94	105	100	96	94	98	95	92	95	93	91	93	91	89	88
4	103	97	93	89	101	96	92	89	94	90	88	92	89	87	90	88	86	85
5	99	93	88	85	98	92	88	85	90	87	84	89	86	83	87	85	83	81
6	96	89	85	81	95	88	84	81	87	83	81	86	83	80	85	82	80	78
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	80	76	74	73
9	87	80	75	72	86	79	75	72	79	75	72	78	74	72	77	74	72	71
10	85	77	73	70	84	77	73	70	76	72	70	75	72	69	75	72	69	68

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
269 lm	350 lm	229 lm	57.2 lm	1.92 lm	1.85 lm	1.76 lm	2.29 lm	2.71 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm