

Light efficiency:



Output: 962 lm

Light quality:




Peak: 3423 cd

Power: 15.0 W



Beam angle

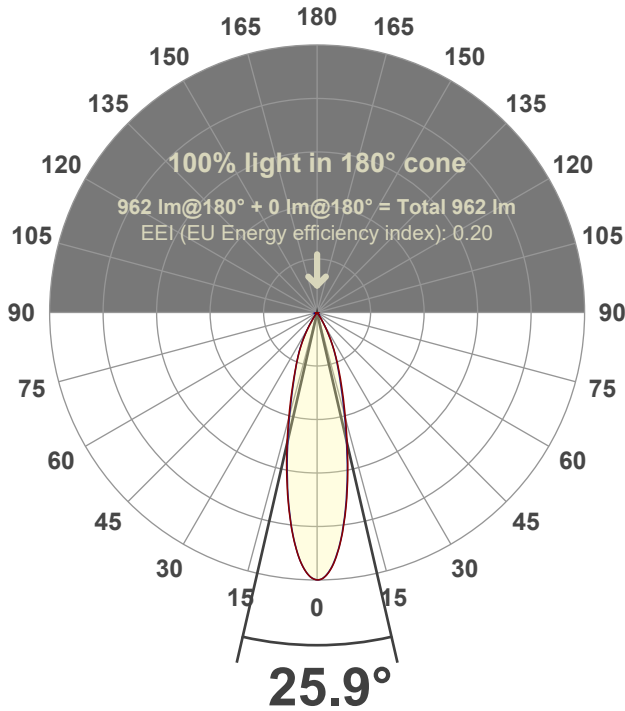

Test number:

GR-O-F-A14-3022-NF-SQ-91A-Rev2

Luminaire Model:

Graffiti Open Square Fixed Downlight-A14-3022 24° Optic-Solite


Date and time:

6/30/2022 4:26:03 PM


Delivered Lumens

962

Spectra

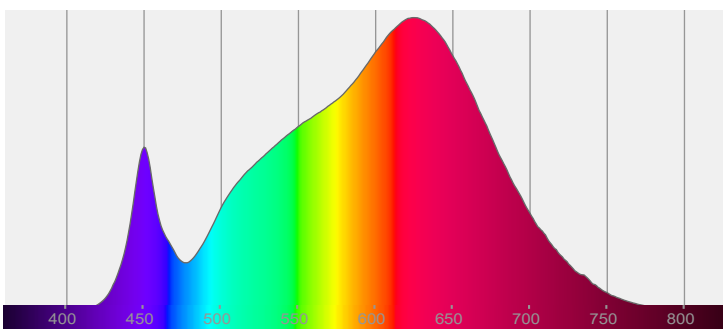

CRI: 94.1 (R1-R8)

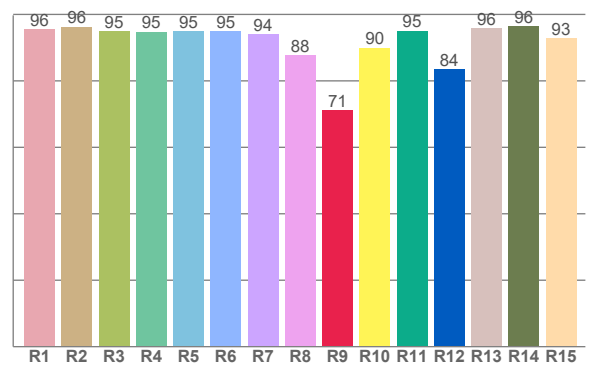

Color parameters


	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	94.1	71.2	91.7	102.5	90.9	0.435	0.399	0.252	0.346	-0.0020

R_f 91.7
Fidelity index R_f


R_g 102.5
Gammut index R_g

TM30: 91.7



TM-30Color

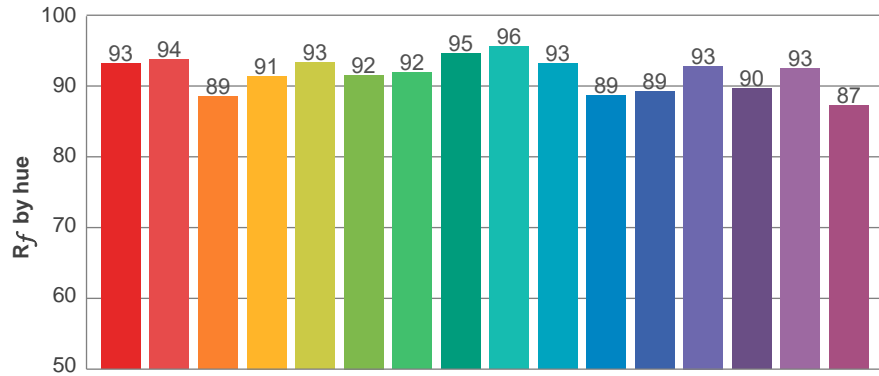


Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	93	-3%	-1%
2	94	-3%	3%
3	89	0%	6%
4	91	2%	4%
5	93	4%	4%
6	92	6%	0%
7	92	2%	-5%
8	95	1%	-3%
9	96	-2%	-1%
10	93	-2%	3%
11	89	0%	8%
12	89	5%	4%
13	93	5%	-2%
14	90	6%	-6%
15	93	1%	-4%
16	87	0%	-10%

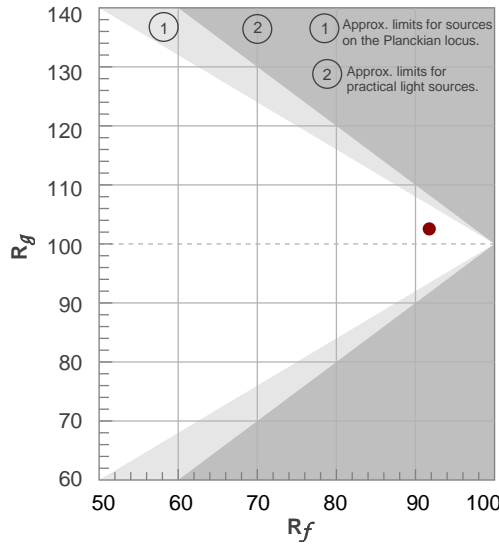


Color vector graphics

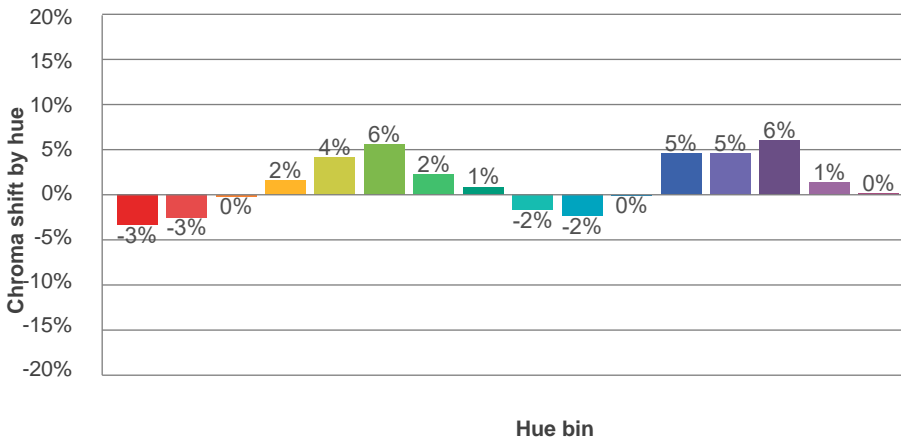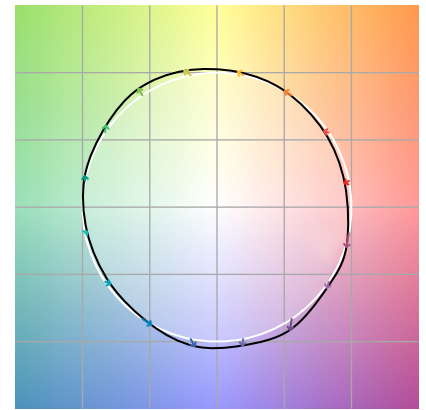

Color distortion

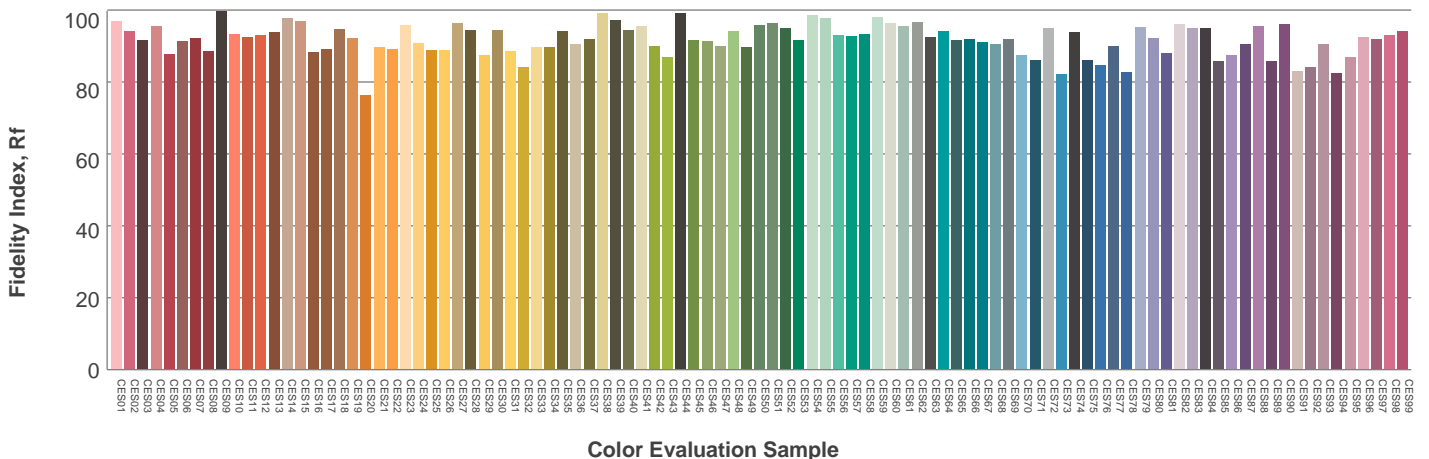

Beam details

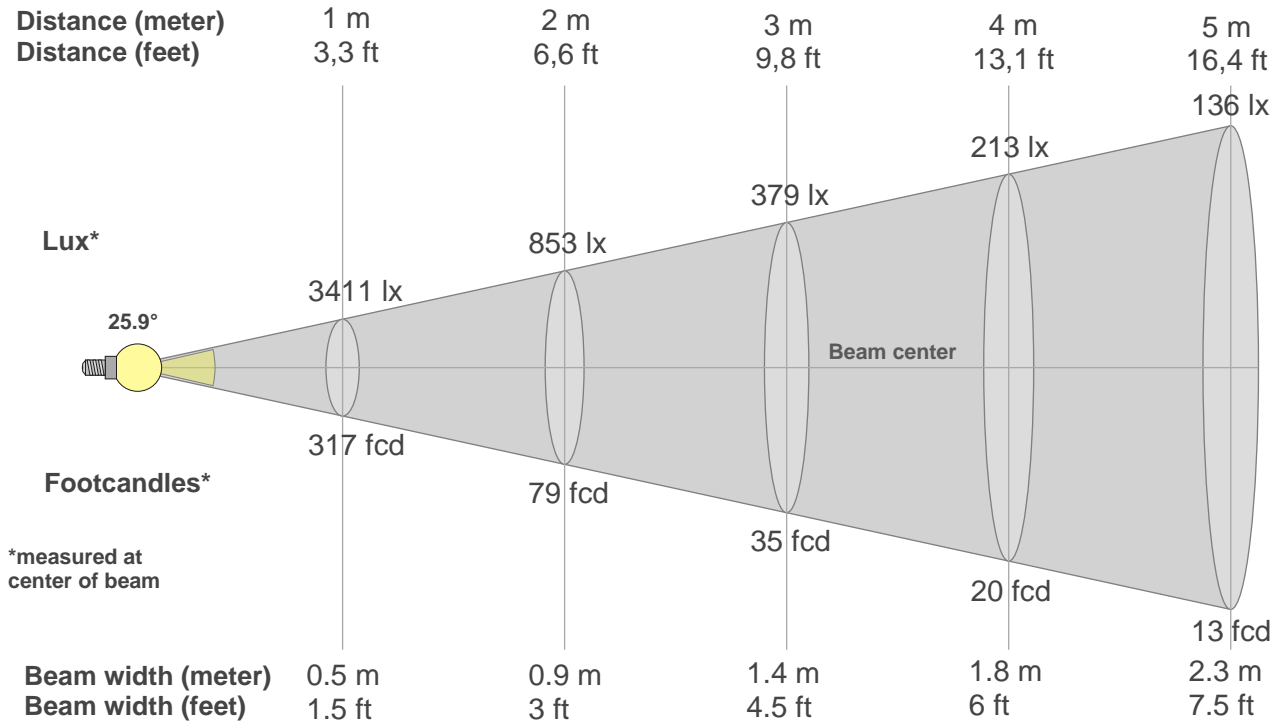

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3411lx	853lx	379lx	213lx	136lx	95lx	70lx	53lx	42lx	34lx	28lx	24lx	20lx	17lx	15lx	13lx	12lx	11lx	9lx	9lx
316.9fcd	79.2fcd	35.2fcd	19.8fcd	12.7fcd	8.8fcd	6.5fcd	5fcd	3.9fcd	3.2fcd	2.6fcd	2.2fcd	1.9fcd	1.6fcd	1.4fcd	1.2fcd	1.1fcd	1fcd	0.9fcd	0.8fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3411	3360	3198	2937	2605	2252	1898	1567	1281	1051	862	701	561	435	320	225	151	98	62	39
100%	99%	94%	86%	76%	66%	56%	46%	38%	31%	25%	21%	16%	13%	9%	7%	4%	3%	2%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3411	3352	3183	2922	2586	2221	1856	1519	1231	992	818	673	542	418	303	206	133	80	45	26
100%	98%	93%	86%	76%	65%	54%	45%	36%	29%	24%	20%	16%	12%	9%	6%	4%	2%	1%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3411	3349	3180	2909	2578	2232	1890	1568	1281	1052	867	717	590	474	365	266	183	120	76	49
100%	98%	93%	85%	76%	65%	55%	46%	38%	31%	25%	21%	17%	14%	11%	8%	5%	4%	2%	1%


Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3411	3352	3182	2896	2561	2203	1846	1515	1239	1019	847	709	594	486	375	272	184	116	67	38
100%	98%	93%	85%	75%	65%	54%	44%	36%	30%	25%	21%	17%	14%	11%	8%	5%	3%	2%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
25.9°	56°	69.5°	99.1%	98.5%

LAMPS (number of lamps)
50

Light planning Luminaire budgetary diagram

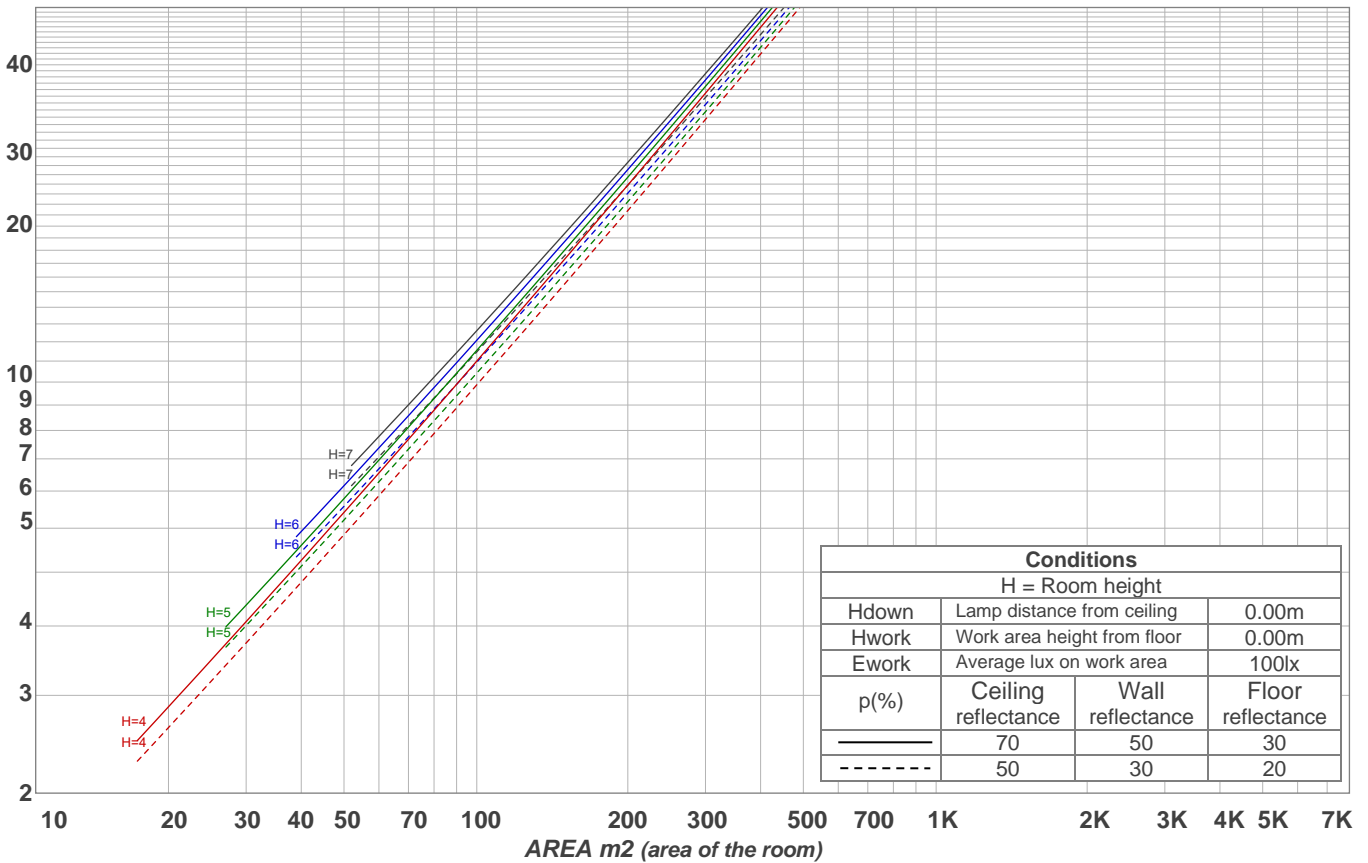

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0			
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																				
	Room Values are expressed as percentage of Lumens delivered to the task surface																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96	96	96	96
2	110	106	103	100	108	105	102	99	101	99	97	99	97	95	96	94	93	91	91	91	91
3	106	101	97	94	104	100	96	93	97	94	92	95	92	90	93	91	89	88	88	88	88
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84	84	84	84
5	99	92	88	84	97	92	87	84	90	86	83	88	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	80	87	83	80	85	82	79	84	81	79	78	78	78	78
7	92	85	81	77	91	85	80	77	83	80	77	82	79	76	81	78	76	75	75	75	75
8	89	82	77	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72	72	72	72
9	87	79	75	72	86	79	74	71	78	74	71	77	74	71	76	73	71	70	70	70	70
10	84	77	72	69	83	76	72	69	75	72	69	75	71	69	74	71	68	67	67	67	67

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
265 lm	387 lm	232 lm	58.4 lm	7.96 lm	3.62 lm	2.95 lm	2.82 lm	2.43 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm