

Light efficiency:




Output: 559 lm

Light quality:




Peak: 381 cd

Power: 15.0 W

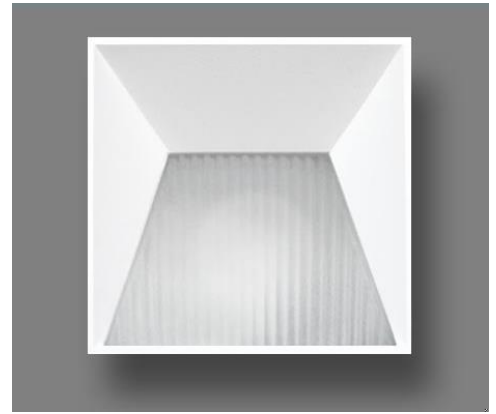

Beam angle

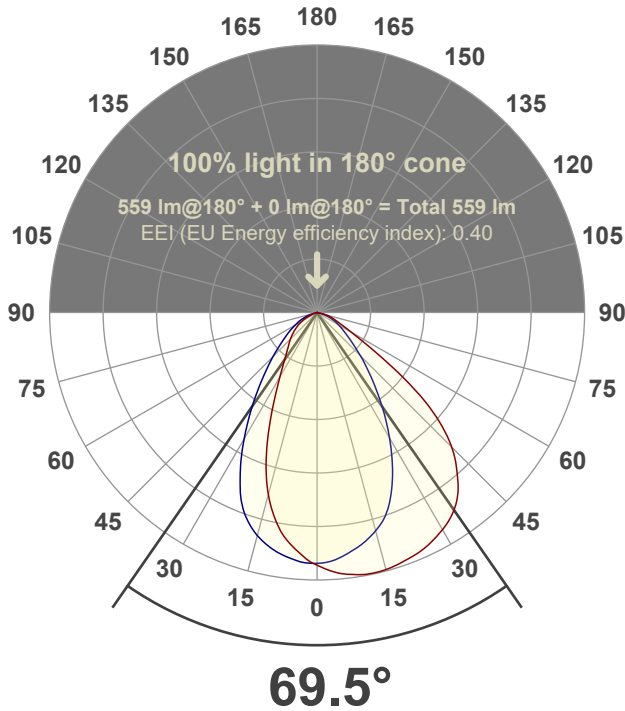

Test number:

GR-W-A14-2722-SQ-Rev2

Luminaire Model:

Graffiti Wallwash Square A14-2722


Date and time:

7/7/2022 2:41:22 PM


Delivered Lumens

559

Spectra

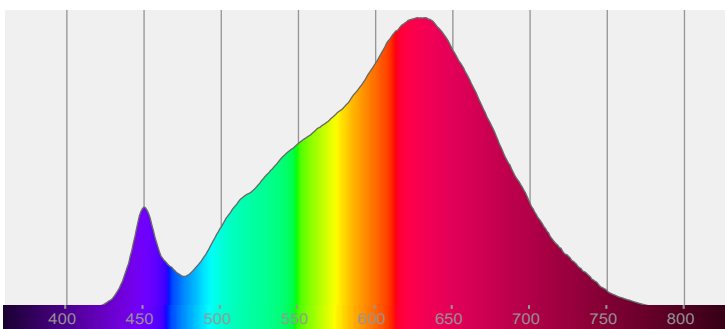

CRI: 93.7 (R1-R8)

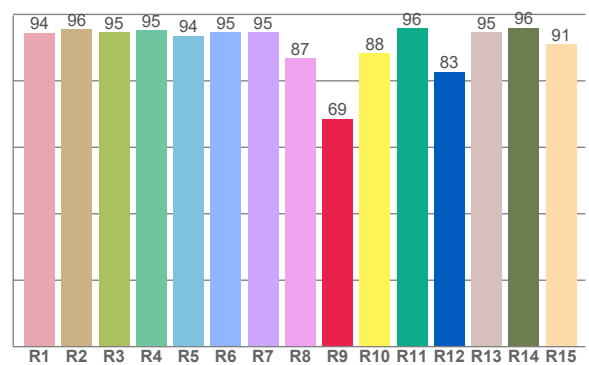


Color parameters

	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	93.7	68.6	92.5	101.2	91.2	0.461	0.413	0.262	0.352	0.0008

R_f 92.5
Fidelity index R_f


R_g 101.2
Gammut index R_g

TM30: 92.5


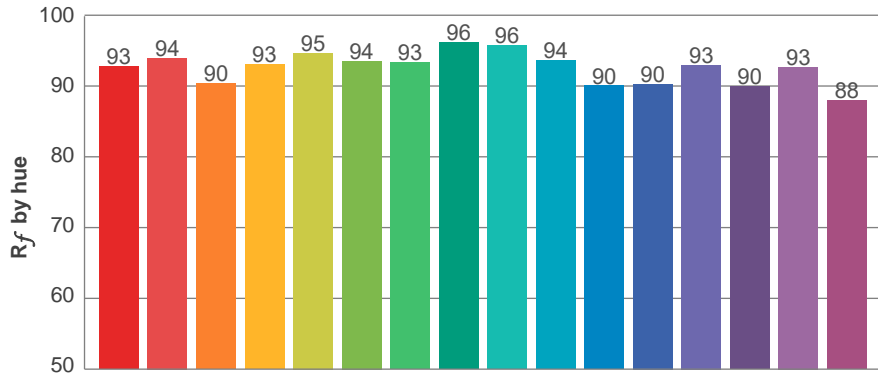


TM-30Color


Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	93	-4%	-1%
2	94	-3%	2%
3	90	-1%	5%
4	93	1%	4%
5	95	3%	4%
6	94	4%	1%
7	93	2%	-3%
8	96	0%	-3%
9	96	-2%	-1%
10	94	-2%	3%
11	90	0%	7%
12	90	4%	2%
13	93	4%	-3%
14	90	5%	-6%
15	93	1%	-4%
16	88	-1%	-9%

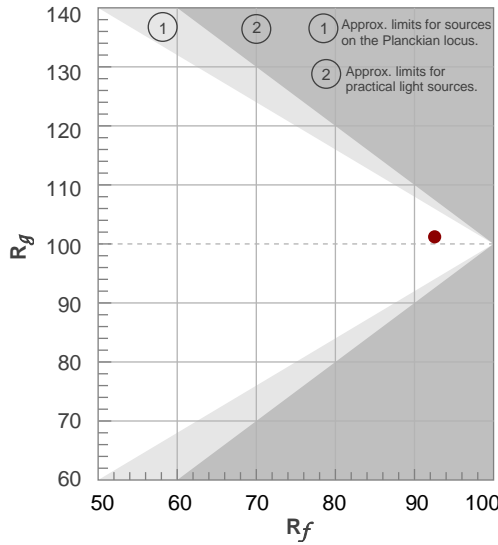


Color vector graphics

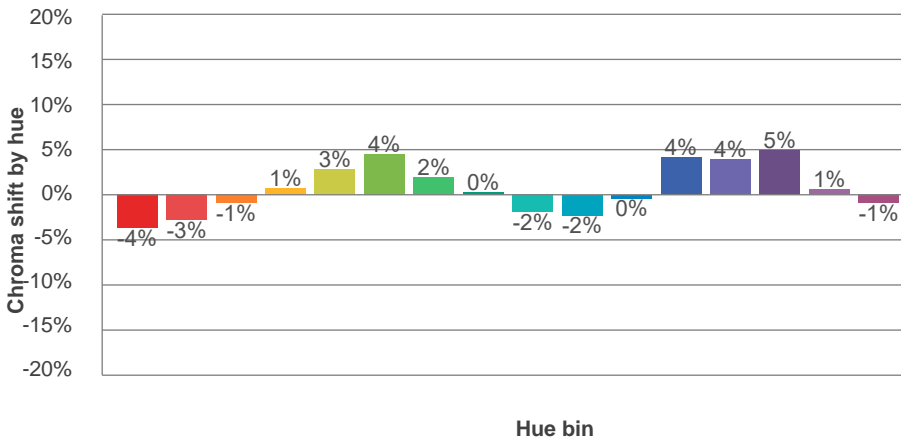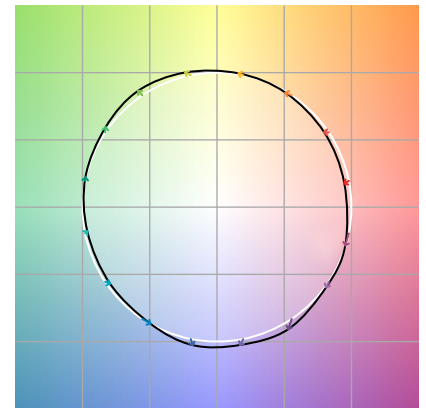

Color distortion

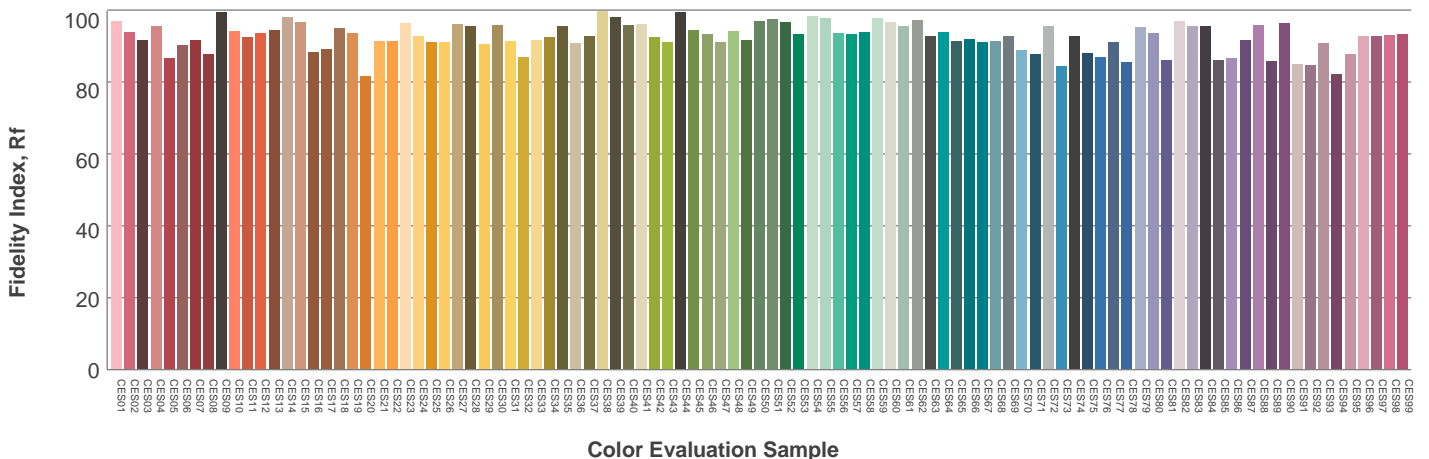

Beam details

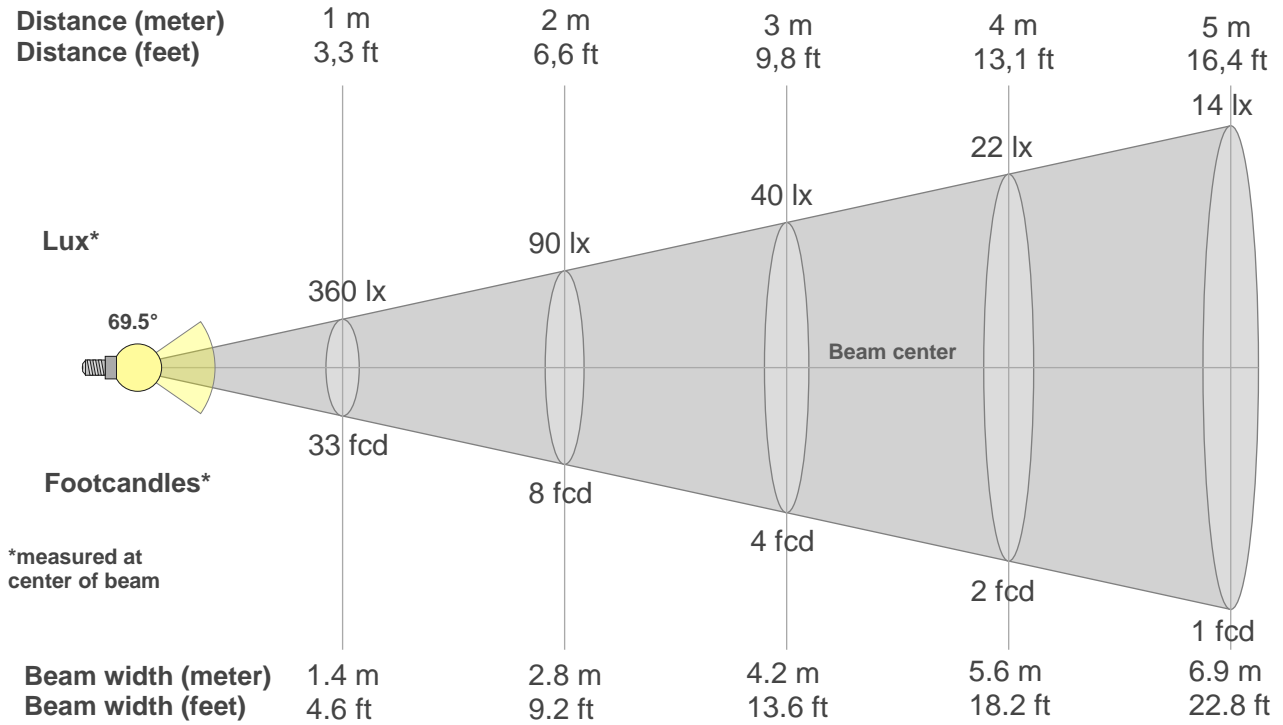

*measured at center of beam

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
360lx	90lx	40lx	22lx	14lx	10lx	7lx	6lx	4lx	4lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx
33.4fcd	8.4fcd	3.7fcd	2.1fcd	1.3fcd	0.9fcd	0.7fcd	0.5fcd	0.4fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
360	374	380	380	375	369	358	342	313	272	210	120	61	36	25	17	9	3	0	0
100%	104%	106%	106%	104%	103%	100%	95%	87%	76%	58%	33%	17%	10%	7%	5%	3%	1%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
360	352	340	323	297	256	208	161	121	89	65	48	37	27	19	10	5	2	1	0
100%	98%	94%	90%	82%	71%	58%	45%	34%	25%	18%	13%	10%	8%	5%	3%	1%	1%	0%	0%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
360	340	312	269	212	152	108	80	65	54	45	36	27	18	10	7	5	3	2	0
100%	95%	87%	75%	59%	42%	30%	22%	18%	15%	12%	10%	7%	5%	3%	2%	1%	1%	1%	0%


Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
360	355	345	330	304	261	209	161	121	90	67	51	38	28	19	10	4	2	0	0
100%	99%	96%	92%	85%	72%	58%	45%	34%	25%	19%	14%	11%	8%	5%	3%	1%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
69.5°	121.6°	151.6°	92.0%	73.7%

LAMPS (number of lamps)
50

Light planning Luminaire budgetary diagram

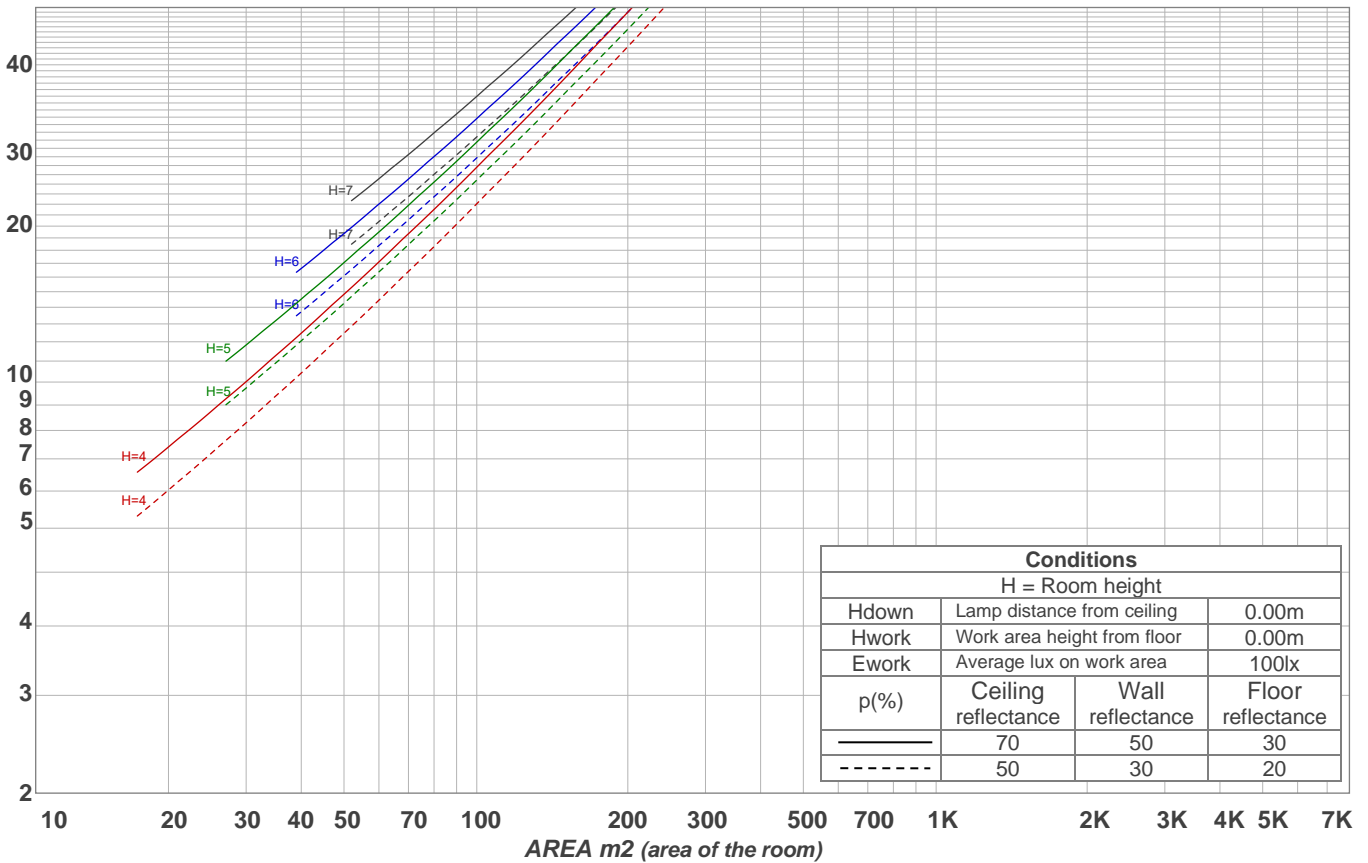

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0			
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																				
	Room Values are expressed as percentage of Lumens delivered to the task surface																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	108	104	101	109	105	102	100	101	99	97	97	96	94	94	92	91	89	89	89	89
2	103	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	80	79	79	79	79
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70	70	70	70
4	89	80	72	67	87	78	71	66	76	70	65	74	69	65	72	67	64	62	62	62	62
5	83	73	65	59	81	71	64	59	70	63	58	68	62	58	66	61	57	56	56	56	56
6	78	66	59	53	76	66	58	53	64	57	53	62	57	52	61	56	52	50	50	50	50
7	73	61	54	48	71	60	53	48	59	53	48	58	52	48	56	51	47	45	45	45	45
8	68	57	49	44	67	56	49	44	55	48	44	54	48	43	52	47	43	42	42	42	42
9	64	53	45	40	63	52	45	40	51	45	40	50	44	40	49	44	40	38	38	38	38
10	61	49	42	37	60	48	42	37	48	41	37	47	41	37	46	41	37	35	35	35	35

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
33.6 lm	91.3 lm	120 lm	116 lm	94.0 lm	58.9 lm	29.5 lm	12.3 lm	2.83 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm