


CAUTIONS AND WARNINGS:

1. This product *must* be installed in accordance with the applicable installation code by a licensed electrician familiar with the construction and operation of the product and hazards involved.
2. Power *must* be **OFF** when connecting the fixture. "Hot plugging" the light engine and driver will damage the LED source.
DO NOT CONNECT LIGHT ENGINE TO THE BUILDING AC POWER.
3. The light engine is low voltage and is factory wired to the driver.

DISCLAIMER: Screw and hardware on the outer edge of adjustable head are **NOT** to be tampered with. **ANY** adjustment **WILL VOID** warranty.



A Anchor mounting rails into joists with screws. Slide Bracket Pan with butterfly brackets into mounting rails. Clip mounting rails to secure.

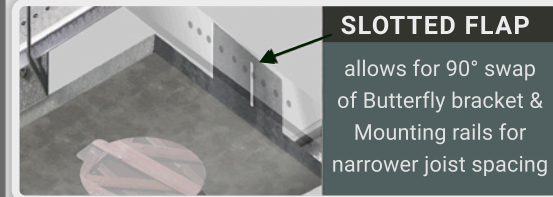

SLOTTED FLAP

allows for 90° swap of Butterfly bracket & Mounting rails for narrower joist spacing


B Bottom of bracket pan should either be flush with bottom of ceiling joists or 1/8" higher than bottom of joists



C Cutout opening for light install.



E Plaster receiver flange. Finish electrical

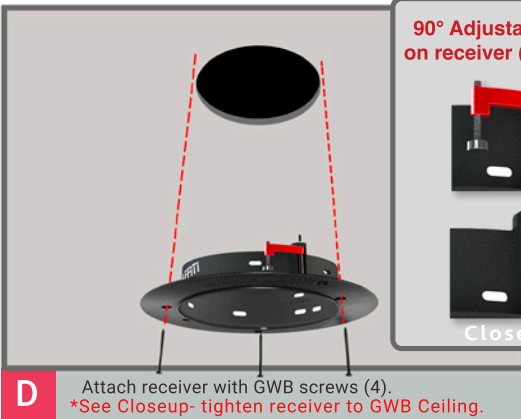

D Attach receiver with GWB screws (4).
*See Closeup- tighten receiver to GWB Ceiling.

90° Adjustable Clamp on receiver (retractable)




Close-up



F Slide light assembly into receiver. Finish plastering GWB.

CLOSEUP
Use a Phillips screwdriver to adjust height of the ceiling clamp to secure a tight fit between GWB ceiling and light fixture.

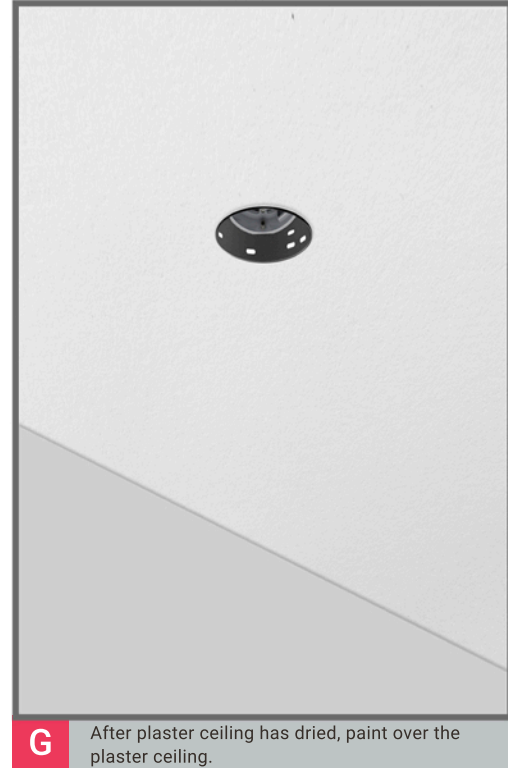

G After plaster ceiling has dried, paint over the plaster ceiling.



H Make sure trim ball plungers clicks into receiver to secure.

IMPORTANT
Ball Plungers on round flanged trim and light assembly needs to click into receiver

*Trim in view is GRW- Round Flangeless Trim

How to secure with safety cables?



Safety cable clip clicks into Receiver safety cable

Push-pin Fastener

Push-pin fastener locks trim safety cable trim to lamp assembly

Installation Instructions for Bracket Pan Round Plaster Receiver GRF, GR, GRO, GRW

TRIMS AVAILABLE

