


CAUTIONS AND WARNINGS:

1. This product *must* be installed in accordance with the applicable installation code by a licensed electrician familiar with the construction and operation of the product and hazards involved.
2. Power *must* be **OFF** when connecting the fixture. "Hot plugging" the light engine and driver will damage the LED source.
3. The light engine is low voltage and is factory wired to the driver. **DO NOT CONNECT LIGHT ENGINE TO THE BUILDING AC POWER.**

DISCLAIMER: Screw and hardware on the outer edge of adjustable head are **NOT** to be tampered with. **ANY** adjustment **WILL VOID** warranty.



- A** Anchor mounting rails into joists with screws. Slide Bracket Pan with butterfly brackets into mounting rails. Clip mounting rails to secure.

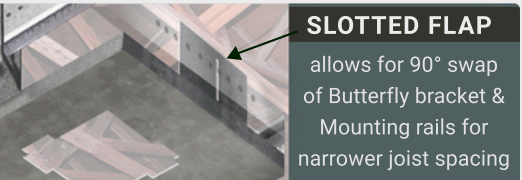

SLOTTED FLAP
allows for 90° swap of Butterfly bracket & Mounting rails for narrower joist spacing


- B** Bottom of bracket pan should either be flush with bottom of ceiling joists or 1/8" higher than bottom of joists.



- C** Paint over ceiling before installation.



- E** Tighten screws to clamp receiver to ceiling. Finalize electrical wiring/connections.

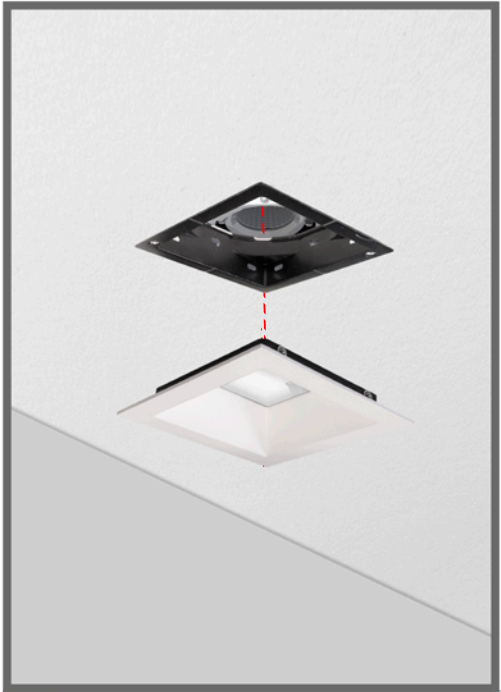

- G** After light assembly has been installed. Click flanged trim ball plungers (4) into receiver slots.



- D** Slide receiver into ceiling.



- F** Slide light assembly into receiver. Ball plungers(4) on light assembly clicks into 4 slots on receiver.



*Trim in view is GR- Square Flanged Trim

- H** Make sure trim ball plungers clicks into receiver to secure.

How to secure with safety cables?




Safety cable clip clicks into Receiver safety cable

Push-pin Fastener

Push-pin fastener locks trim safety cable trim to lamp assembly

Installation Instructions for Bracket Pan Square Flanged Trim GRF, GR, GRO, GRW

TRIMS AVAILABLE

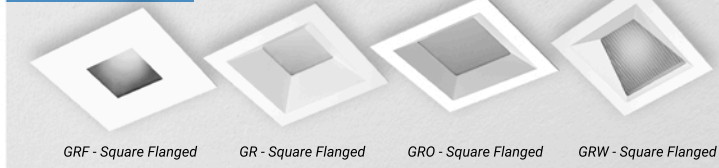

GRF - Square Flanged

GR - Square Flanged

GRO - Square Flanged

GRW - Square Flanged

