

CAUTIONS AND WARNINGS:

1. This product *must* be installed in accordance with the applicable installation code by a licensed electrician familiar with the construction and operation of the product and hazards involved.
2. Power *must* be **OFF** when connecting the fixture. "Hot plugging" the light engine and driver will damage the LED source.
3. The light engine is low voltage and is factory wired to the driver.
DO NOT CONNECT LIGHT ENGINE TO THE BUILDING AC POWER.

DISCLAIMER: Screw and hardware on the outer edge of adjustable head are **NOT** to be tampered with. **ANY** adjustment **WILL VOID** warranty.



A

Adjustable mounting rails anchor housing to ceiling joists with screws



B

Adjustable mounting rails anchor housing to ceiling joists with screws




C

Cutout opening for light install.




E

Plaster receiver flange. Finish electrical

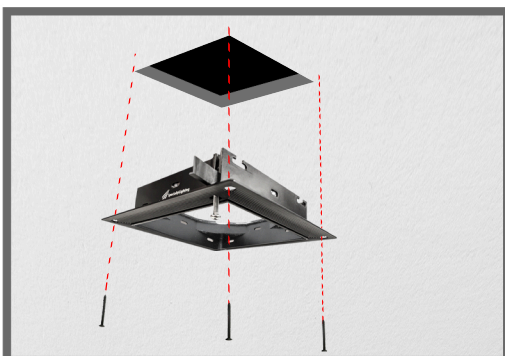


D

Attach receiver with GWB screws (4).

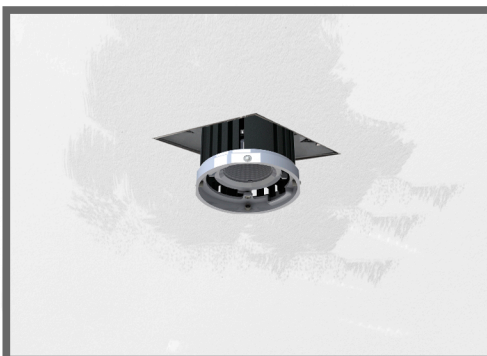


F

Slide light assembly into receiver. Finish plastering GWB.

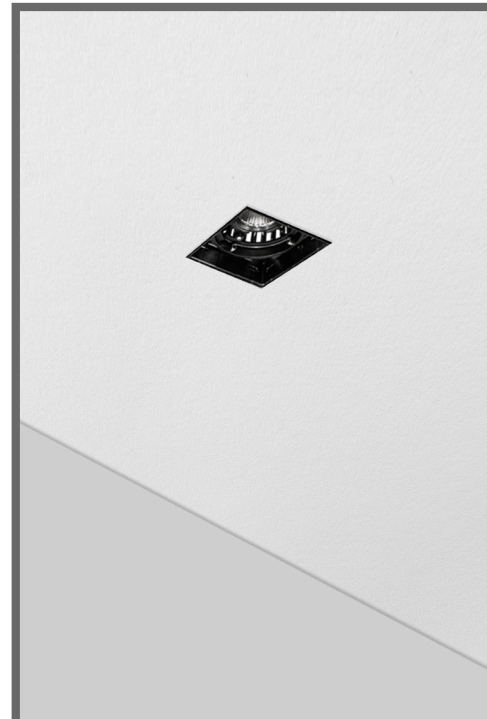

G

After plaster ceiling has dried, paint over the plaster ceiling.

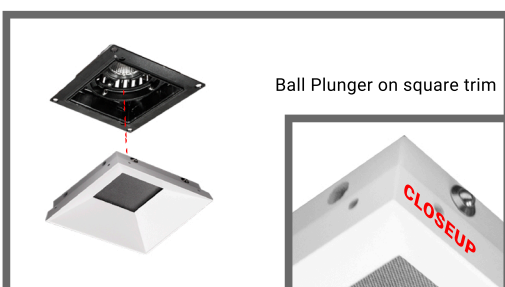

H


Make sure trim ball plungers clicks into receiver to secure.

How to secure with safety cables?



Installation Instructions for Bracket Pan Square Flangeless Trim w/ Housing GRF, GR, GRO, GRW

TRIMS AVAILABLE

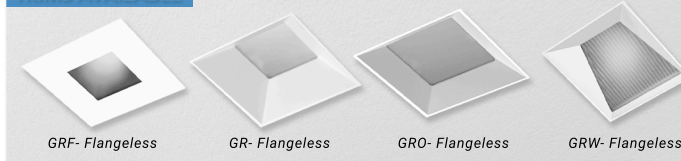

GRAFFITI LIGHTING
by: Specialty Lighting Industries