



A

Remove trim from housing.



B

Shut-off power to fixture. Remove lamp assembly. With power off, disconnect lamp assembly



C

Lay fixture on a flat surface reflector side up, to prevent pieces from falling out when disassembled.



D

Unscrew Heat Sink in counter-clockwise direction to gain access to the reflector.



E

Remove Heat Sink from assembly for easy access to reflector.



F


Remove reflector from lamp assembly.

Pan/Tilt Adjustment



G

Center new reflector in assembly.

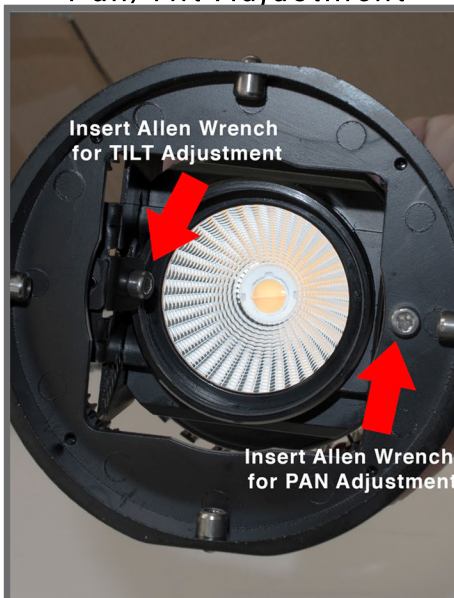

H

Re-install heat sink by turning clockwise into lamp assembly. Re-install into ceiling.

Installation Instructions

Optical Replacement for Graffiti Adjustable GR, GRF, GRO Series

GRAFFITI LIGHTING
by: Specialty Lighting Industries