

Light efficiency:



Light quality:



Color temperature:




Output: 1700 lm
Peak: 12317 cd
Power: 21.1 W
PF: 0.99



Beam angle

15.2°

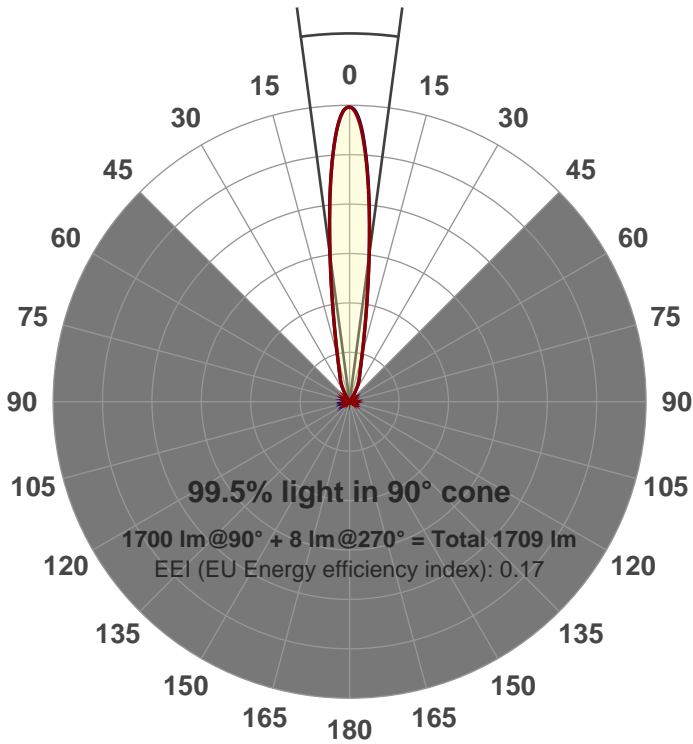

Product name:
GRO-CZ20-SP-RD
Item number:
GRO-CZ20-SP-RD
Date and time:
6/14/2017 4:32:19 PM
Description:
V6


LUM: 1700

PPF: 28.6






CIE 1931
x: 0.428
y: 0.400

Spectra

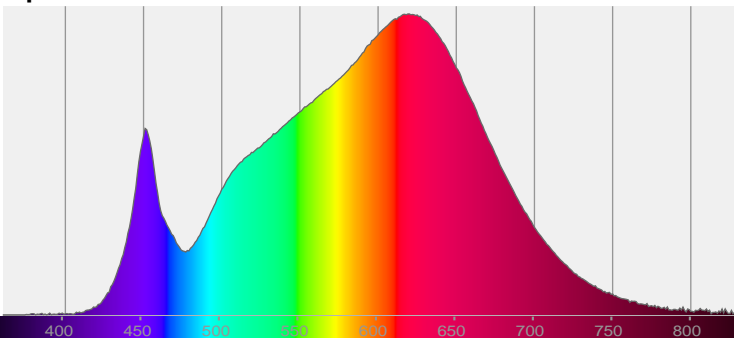


Power

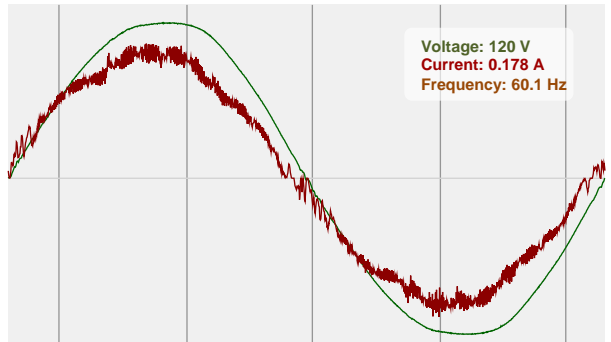


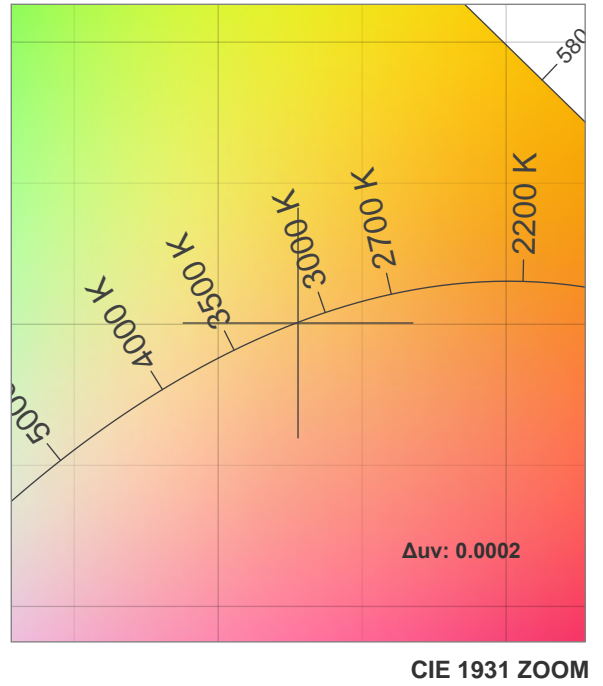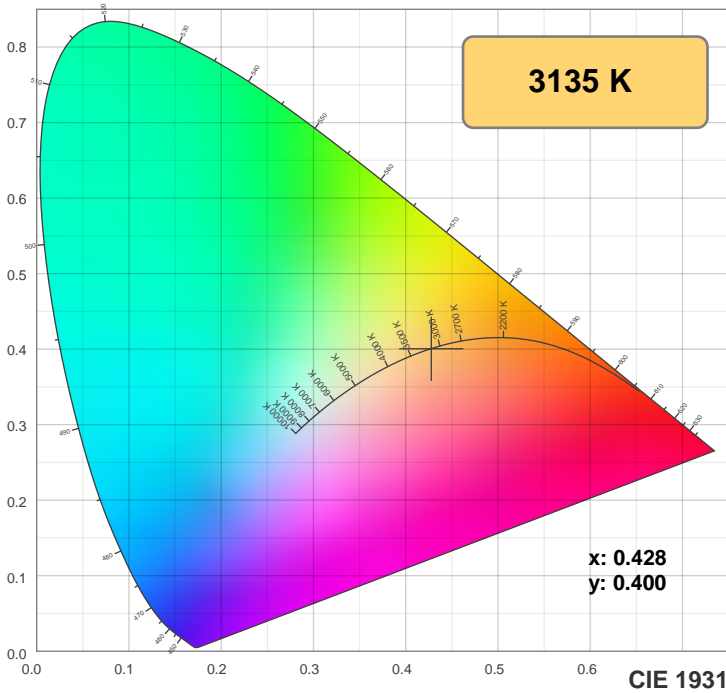

TM30: 90.9

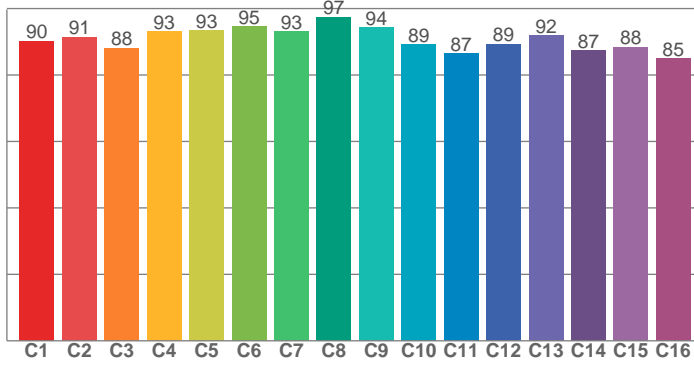

CRI: 92.7 (R1-R8)

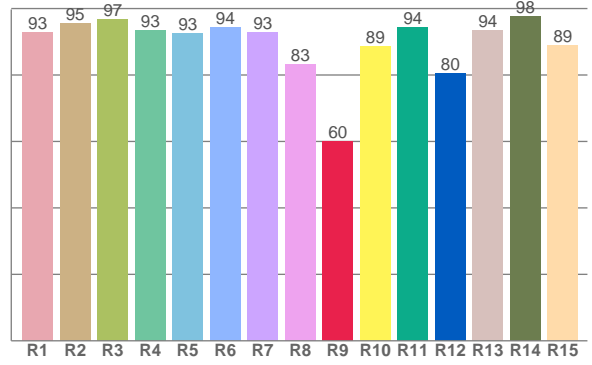

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.9	95.5	96.8	93.5	92.5	94.2	92.9	83.1	60.1	88.7	94.3	80.4	93.6	97.6	89.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90.2	91.5	88.1	93.2	93.4	94.5	93.2	97.5	94.3	89.1	86.5	89.4	92.0	87.3	88.4	84.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89.1	96.9	87.9	88.6	91.7	91.7	91.1	93.0	97.7	93.5	93.0	92.7	92.5	87.1	87.6

CQS: 91.0

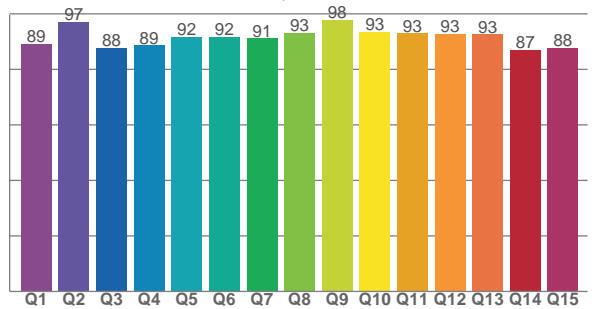

Color parameters







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3135 K	92.7	60.1	90.9	100.2	91.0	0.428	0.400	0.246	0.346	0.0002


TM30 details

Rf 90.9
Fidelity index Rf

Rg 100.2
Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	-1%
2	91	-3%	3%
3	88	-1%	5%
4	93	0%	3%
5	93	0%	3%
6	95	3%	0%
7	93	-1%	-3%
8	97	0%	-1%
9	94	-2%	2%
10	89	-2%	5%
11	87	1%	8%
12	89	6%	2%
13	92	3%	-3%
14	87	5%	-8%
15	88	0%	-7%
16	85	-1%	-11%

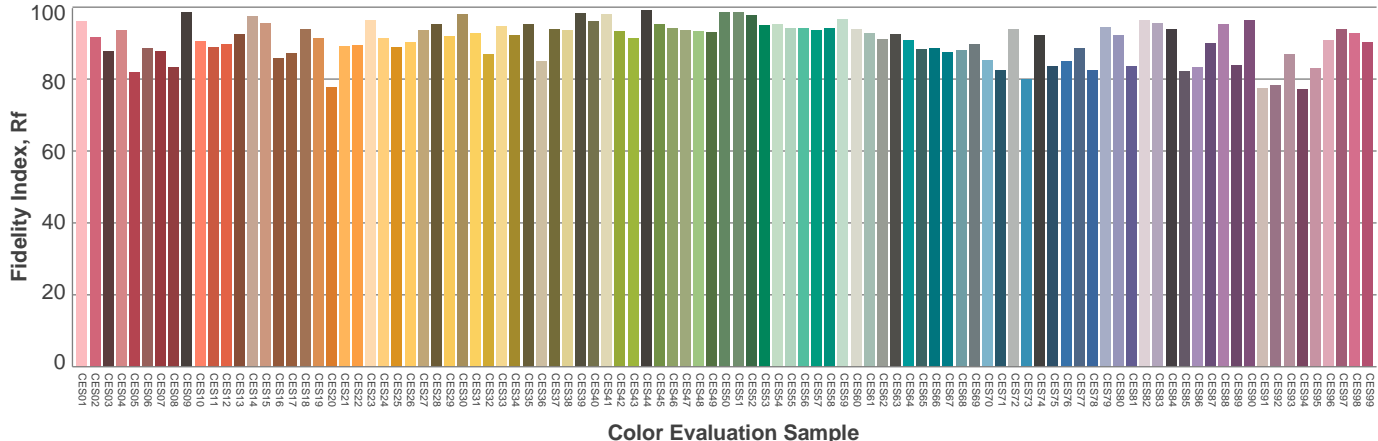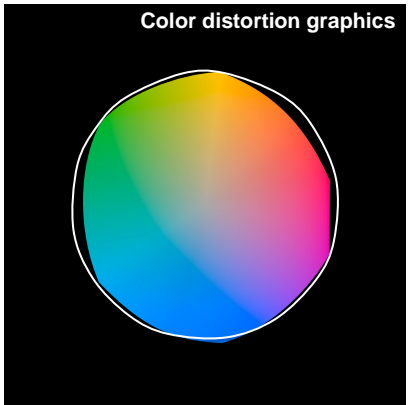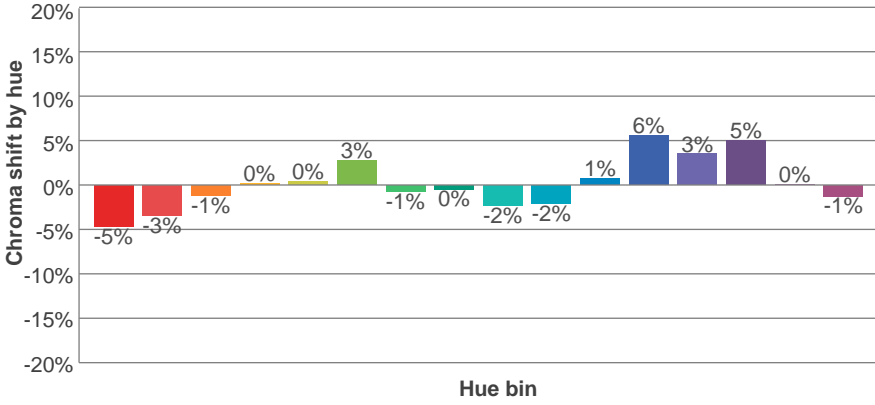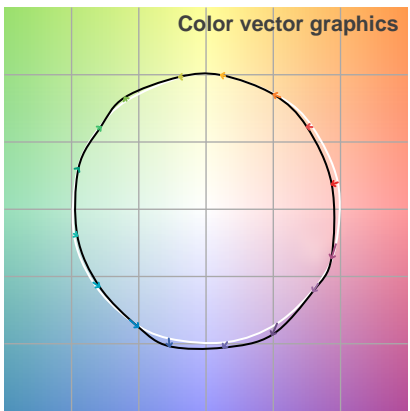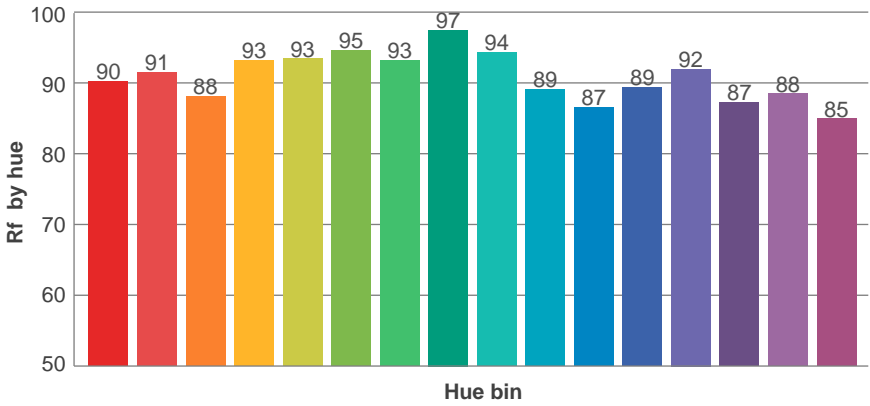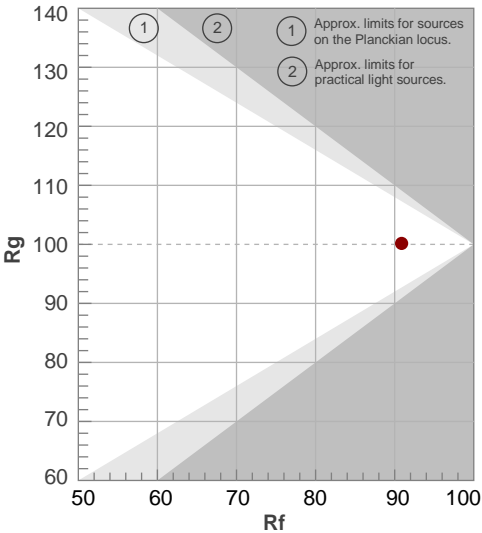

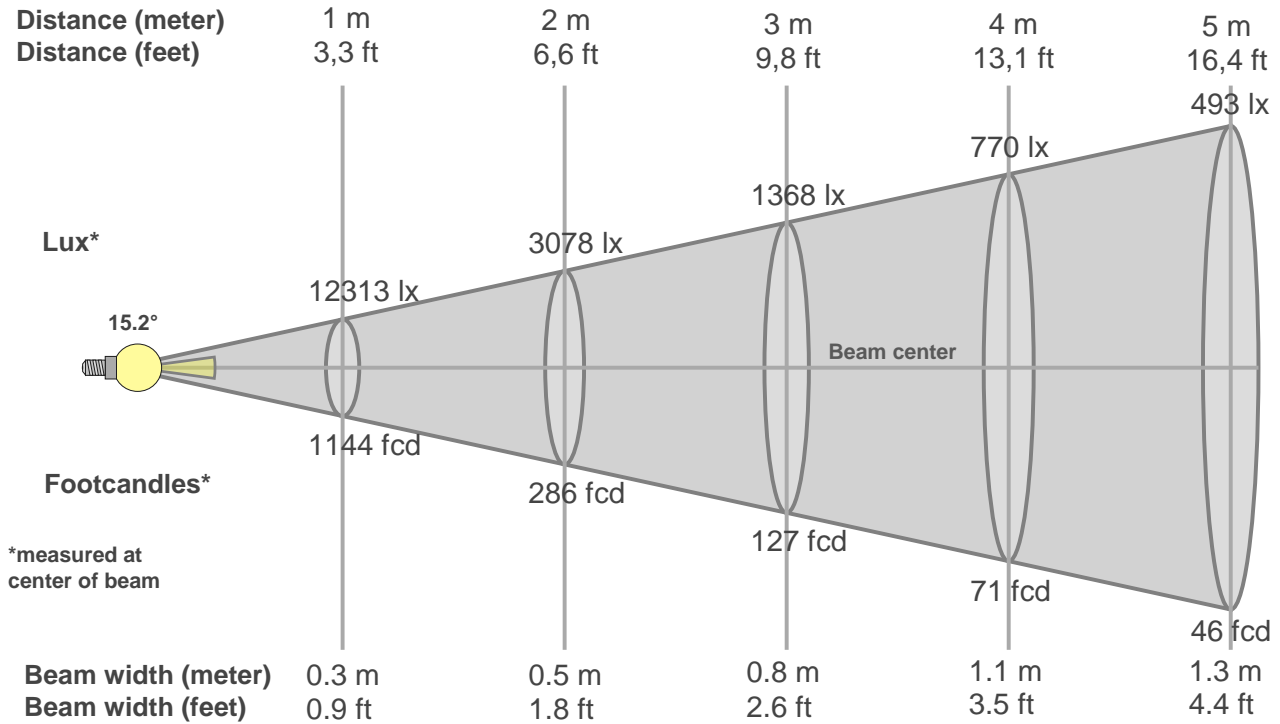

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
12313lx	3078lx	1368lx	770lx	493lx	342lx	251lx	192lx	152lx	123lx	102lx	86lx	73lx	63lx	55lx	48lx	43lx	38lx	34lx	31lx
1143.9fcd	286fcd	127.1fcd	71.5fcd	45.8fcd	31.8fcd	23.3fcd	17.9fcd	14.1fcd	11.4fcd	9.5fcd	7.9fcd	6.8fcd	5.8fcd	5.1fcd	4.5fcd	4fcd	3.5fcd	3.2fcd	2.9fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
12.3K	12.2K	11.8K	11.1K	10.2K	9.2K	8.0K	6.8K	5.8K	4.9K	4.1K	3.5K	3.0K	2.5K	2.2K	2.0K	1.7K	1.6K	1.4K	1.3K
100%	99%	96%	90%	83%	74%	65%	56%	47%	40%	33%	28%	24%	21%	18%	16%	14%	13%	12%	11%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
12.3K	12.2K	11.8K	11.1K	10.2K	9.1K	7.9K	6.8K	5.7K	4.8K	4.0K	3.4K	2.9K	2.5K	2.2K	1.9K	1.7K	1.5K	1.4K	1.3K
100%	99%	96%	90%	83%	74%	65%	55%	47%	39%	33%	28%	23%	20%	18%	16%	14%	13%	11%	11%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
12.3K	12.1K	11.7K	10.9K	10.0K	9.0K	7.9K	6.8K	5.8K	4.9K	4.2K	3.5K	3.0K	2.6K	2.3K	2.0K	1.8K	1.6K	1.5K	1.3K
100%	99%	95%	89%	81%	73%	64%	55%	47%	40%	34%	29%	24%	21%	18%	16%	14%	13%	12%	11%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
12.3K	12.2K	11.8K	11.1K	10.1K	9.1K	7.9K	6.8K	5.7K	4.8K	4.1K	3.5K	3.0K	2.6K	2.3K	2.0K	1.8K	1.6K	1.5K	1.4K
100%	99%	96%	90%	82%	74%	64%	55%	47%	39%	33%	28%	24%	21%	18%	16%	15%	13%	12%	11%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
15.2°	39.9°	61.6°	1.0%	1.0%

THIS PAGE INTENSIONALLY LEFT BLANK