

Light efficiency:



Output: 1542 lm

Light quality:




Peak: 8703 cd

Power: 22.1 W



Beam angle

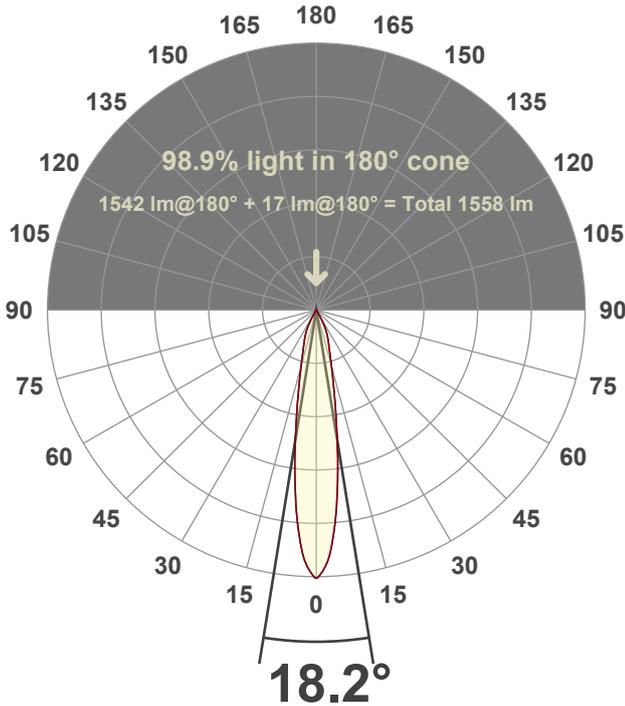

Test number:

GR-RD-AD20-2722-SP

Luminaire Model:

Graffiti Regress Round Downlight-AD20-2722-Spot

Date and time:


2/17/2026 1:45:23 PM

LUM: 1542




*Variation due to source size, bezel geometry, or secondary optics

Spectra

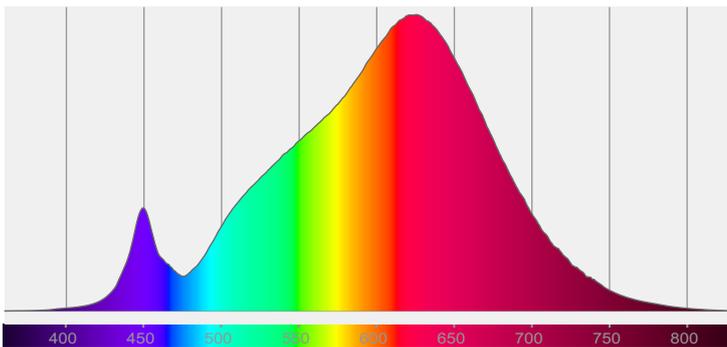

CRI: 91.3 (R1-R8)

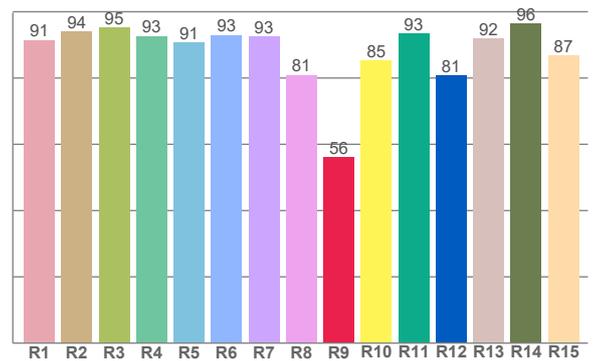

Color parameters


	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	91.3	56.0	91.1	100.4	89.3	0.464	0.415	0.263	0.353	0.0013

R_f 91.1
Fidelity index R_f


R_g 100.4
Gammut index R_g

TM30: 91.1



TM-30Color

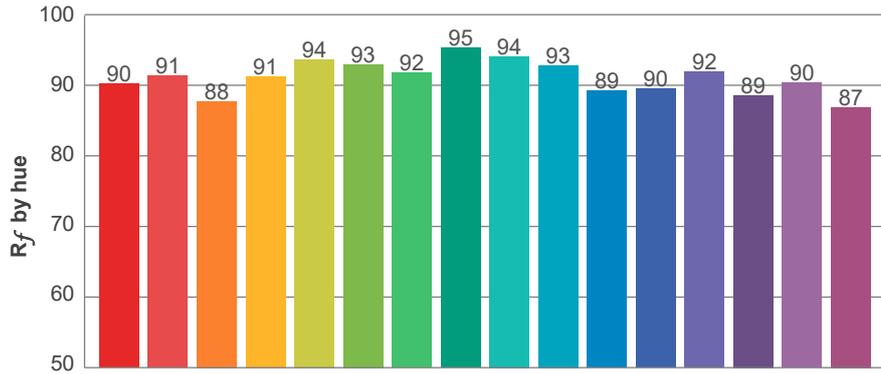



Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	-1%
2	91	-4%	3%
3	88	-1%	6%
4	91	2%	5%
5	94	4%	4%
6	93	5%	1%
7	92	2%	-5%
8	95	0%	-3%
9	94	-3%	-2%
10	93	-3%	3%
11	89	-1%	7%
12	90	4%	2%
13	92	4%	-4%
14	89	5%	-8%
15	90	0%	-6%
16	87	-3%	-10%

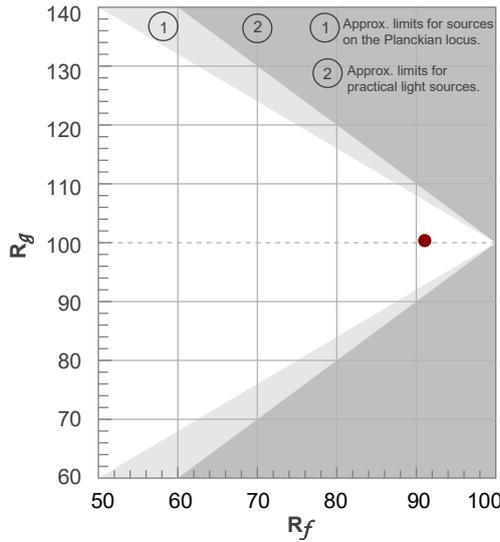


Color vector graphics

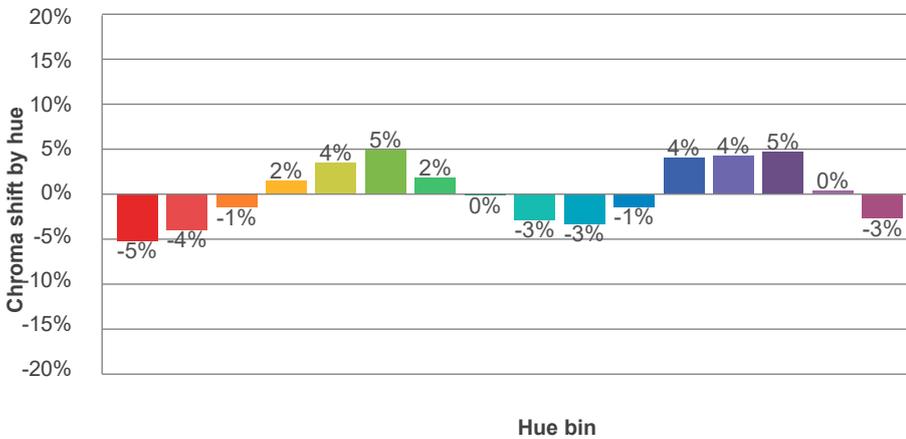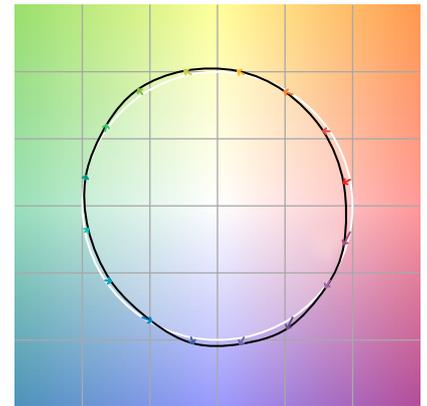

Color distortion

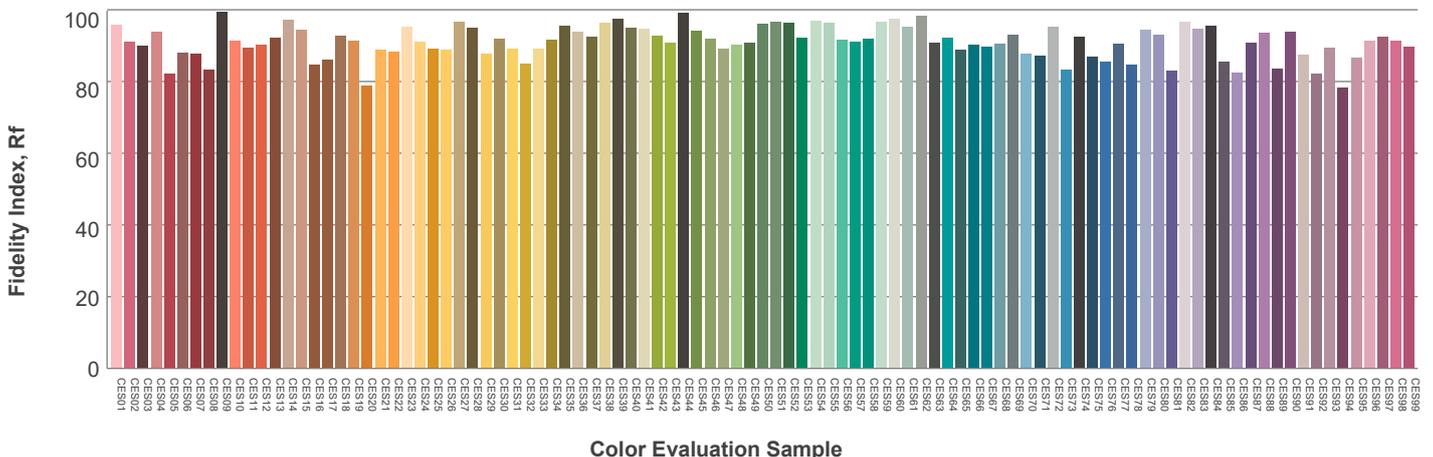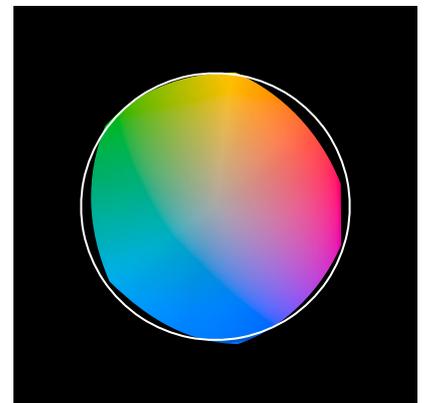

Beam details

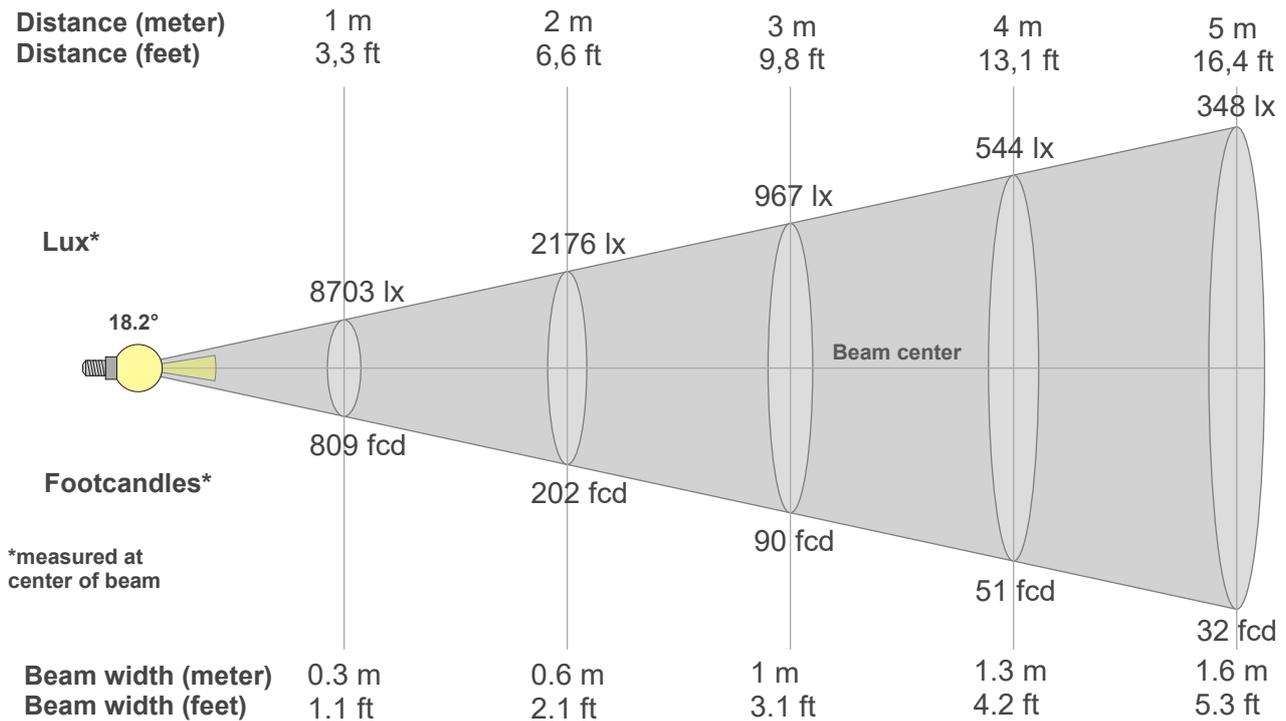

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
8703lx	2176lx	967lx	544lx	348lx	242lx	178lx	136lx	107lx	87lx	72lx	60lx	51lx	44lx	39lx	34lx	30lx	27lx	24lx	22lx
808.5fcd	202.1fcd	89.8fcd	50.5fcd	32.3fcd	22.5fcd	16.5fcd	12.6fcd	10fcd	8.1fcd	6.7fcd	5.6fcd	4.8fcd	4.1fcd	3.6fcd	3.2fcd	2.8fcd	2.5fcd	2.2fcd	2fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
8703	8340	7525	6357	5041	3785	2866	2203	1734	1411	1185	1012	856	681	489	305	158	68	36	27
100%	96%	86%	73%	58%	43%	33%	25%	20%	16%	14%	12%	10%	8%	6%	4%	2%	1%	0%	0%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
8703	8340	7525	6357	5041	3785	2866	2203	1734	1411	1185	1012	856	681	489	305	158	68	36	27
100%	96%	86%	73%	58%	43%	33%	25%	20%	16%	14%	12%	10%	8%	6%	4%	2%	1%	0%	0%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
8703	8340	7525	6357	5041	3785	2866	2203	1734	1411	1185	1012	856	681	489	305	158	68	36	27
100%	96%	86%	73%	58%	43%	33%	25%	20%	16%	14%	12%	10%	8%	6%	4%	2%	1%	0%	0%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
8703	8340	7525	6357	5041	3785	2866	2203	1734	1411	1185	1012	856	681	489	305	158	68	36	27
100%	96%	86%	73%	58%	43%	33%	25%	20%	16%	14%	12%	10%	8%	6%	4%	2%	1%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
18.2°	47.6°	62°	99.0%	98.1%

LAMPS (number of lamps)

50

Light planning Luminaire budgetary diagram

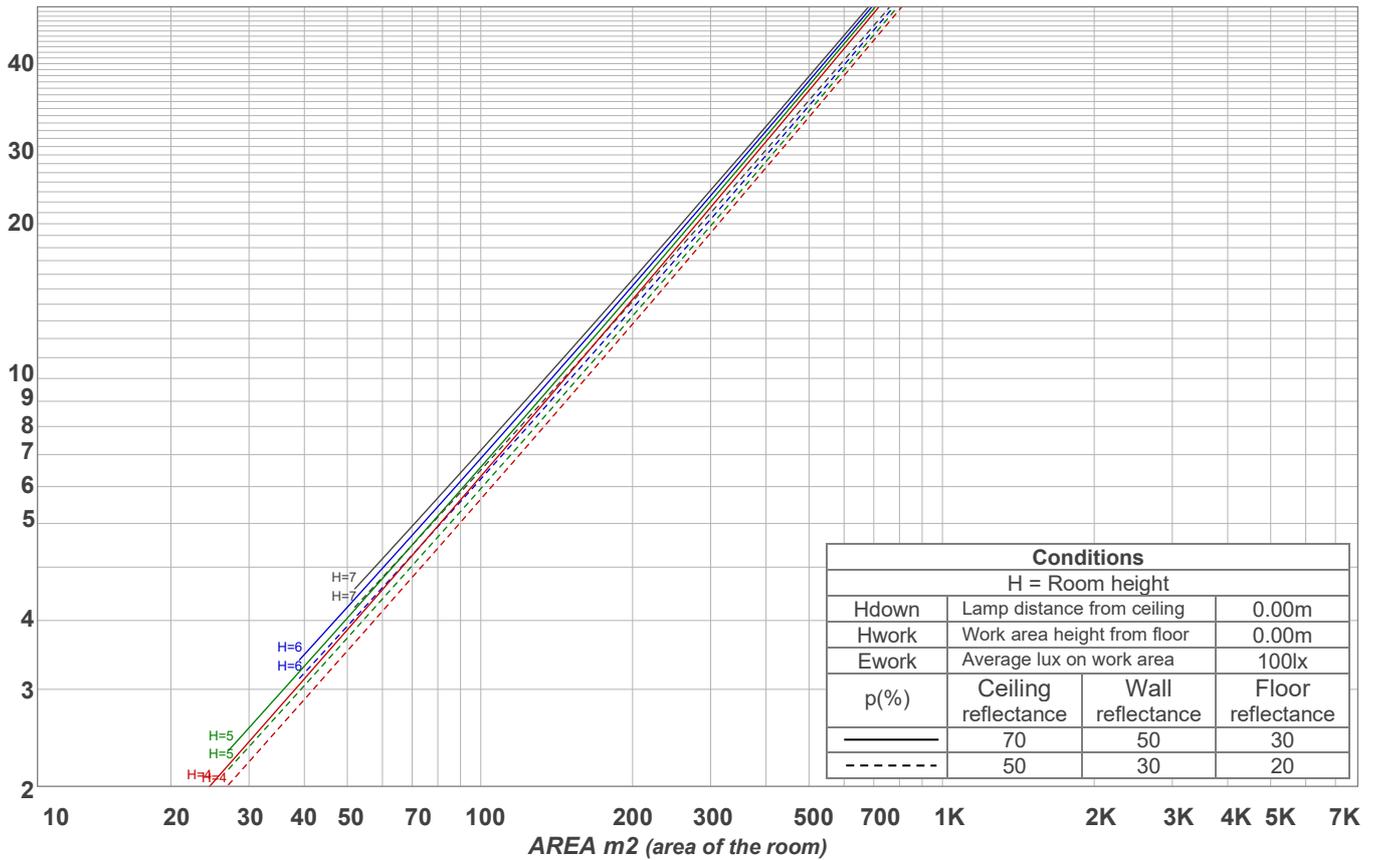

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0			
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	98	98	98	96
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	94	94	94	92
3	107	102	98	95	105	101	97	95	98	96	93	96	94	92	94	92	90	90	90	90	89
4	104	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	87	87	87	86
5	100	94	90	87	99	93	89	87	92	88	86	90	87	85	89	86	84	84	84	84	83
6	97	91	87	84	96	90	86	83	89	85	83	88	85	82	87	84	82	82	82	82	81
7	95	88	84	81	93	87	83	80	86	83	80	85	82	80	84	81	79	79	79	79	78
8	92	85	81	78	91	85	81	78	84	80	77	83	80	77	82	79	77	77	77	77	76
9	89	83	78	75	89	82	78	75	81	78	75	81	77	75	80	77	75	75	75	75	74
10	87	80	76	73	86	80	76	73	79	76	73	78	75	73	78	75	73	73	73	73	72

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
556 lm	563 lm	340 lm	48.3 lm	10.6 lm	8.51 lm	6.32 lm	4.74 lm	4.54 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.