

Light efficiency:

70 Lumen/Watt

Output: 1547 lm

Light quality:


CRI: 91.4

Peak: 2026 cd

Power: 22.1 W



Beam angle

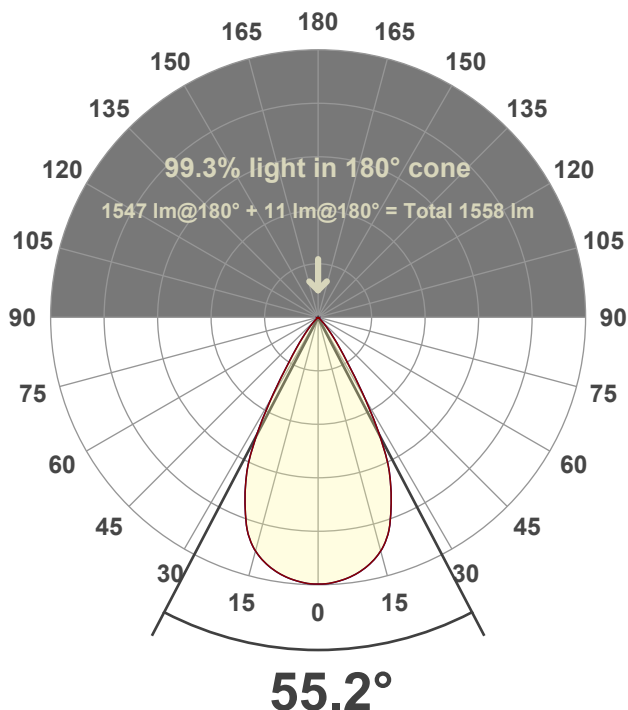

Test number:

GR-RD-AD20-2722-WF

Luminaire Model:

Graffiti Regress Round Downlight-AD20-2722-Wide Flood

Date and time:


2/17/2026 1:35:01 PM

LUM: 1547


2703 K

*Variation due to source size, bezel geometry, or secondary optics

Spectra

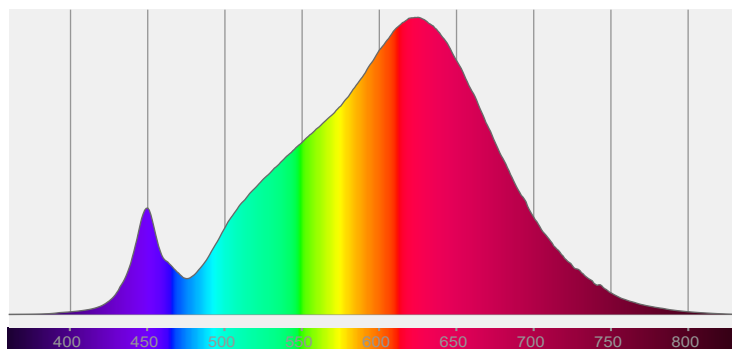

CRI: 91.4 (R1-R8)

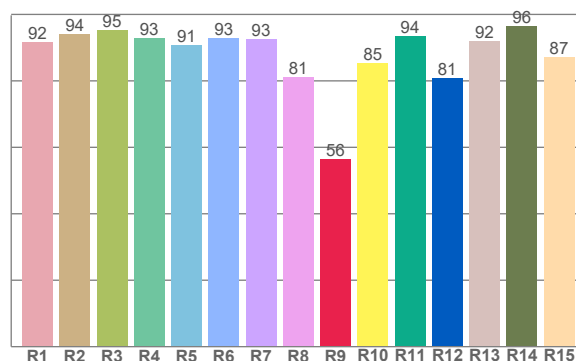

Color parameters

	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	91.4	56.5	91.1	100.4	89.4	0.462	0.415	0.262	0.353	0.0013

R_f 91.1


Fidelity index R_f

R_g 100.4


Gammut index R_g

TM30: 91.1



TM-30Color

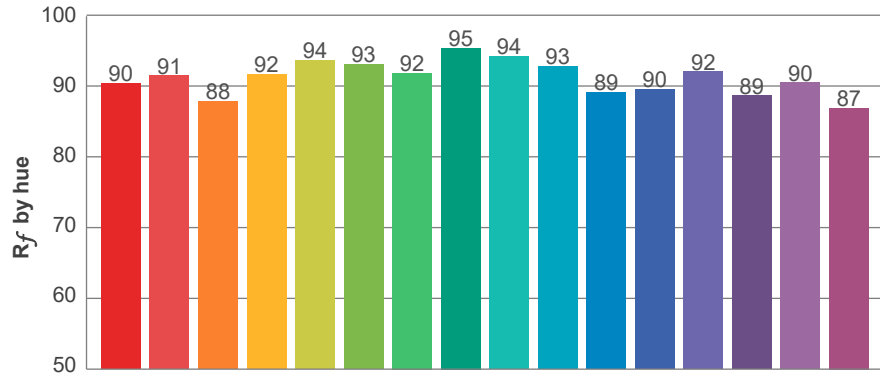

Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	-1%
2	91	-4%	3%
3	88	-1%	6%
4	92	1%	5%
5	94	4%	4%
6	93	5%	1%
7	92	2%	-5%
8	95	0%	-3%
9	94	-3%	-2%
10	93	-3%	3%
11	89	-1%	7%
12	90	4%	2%
13	92	4%	-4%
14	89	5%	-8%
15	90	0%	-6%
16	87	-3%	-10%

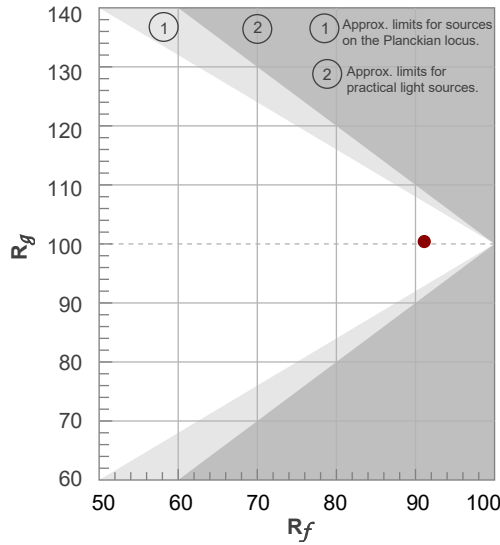


Color vector graphics

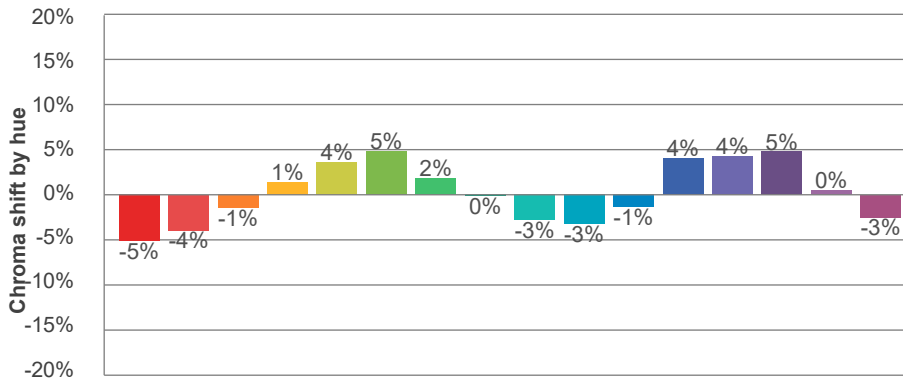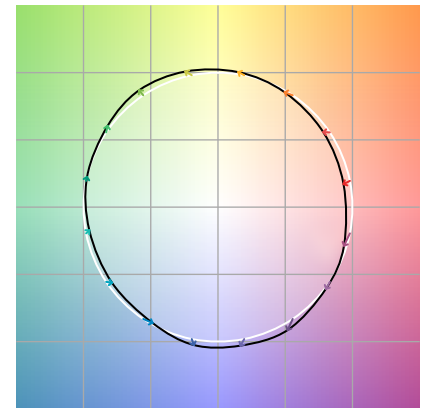


Color distortion



Hue bin

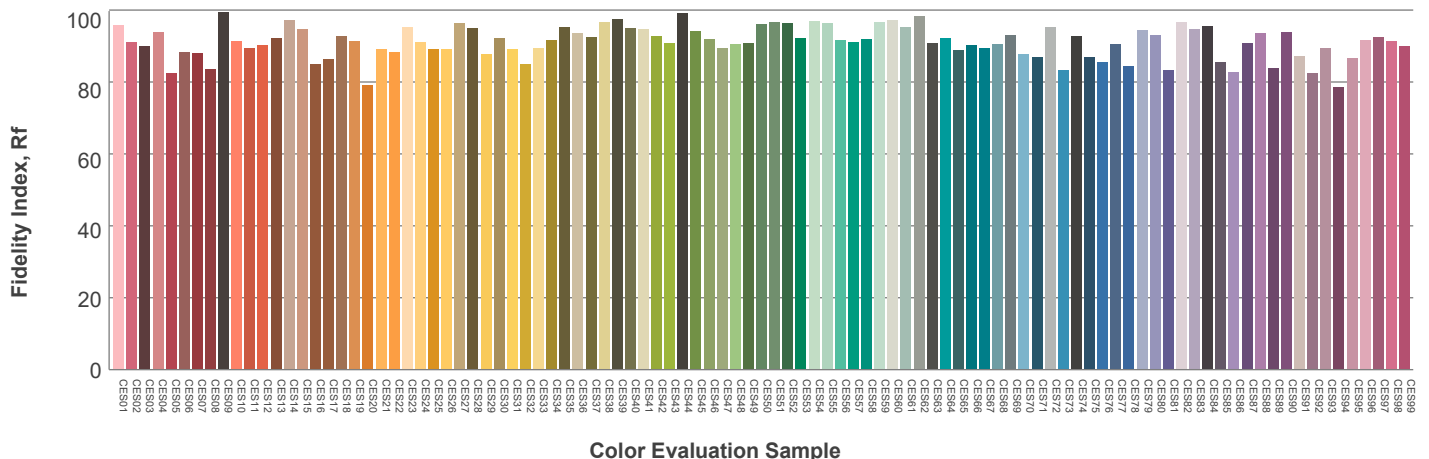

Beam details

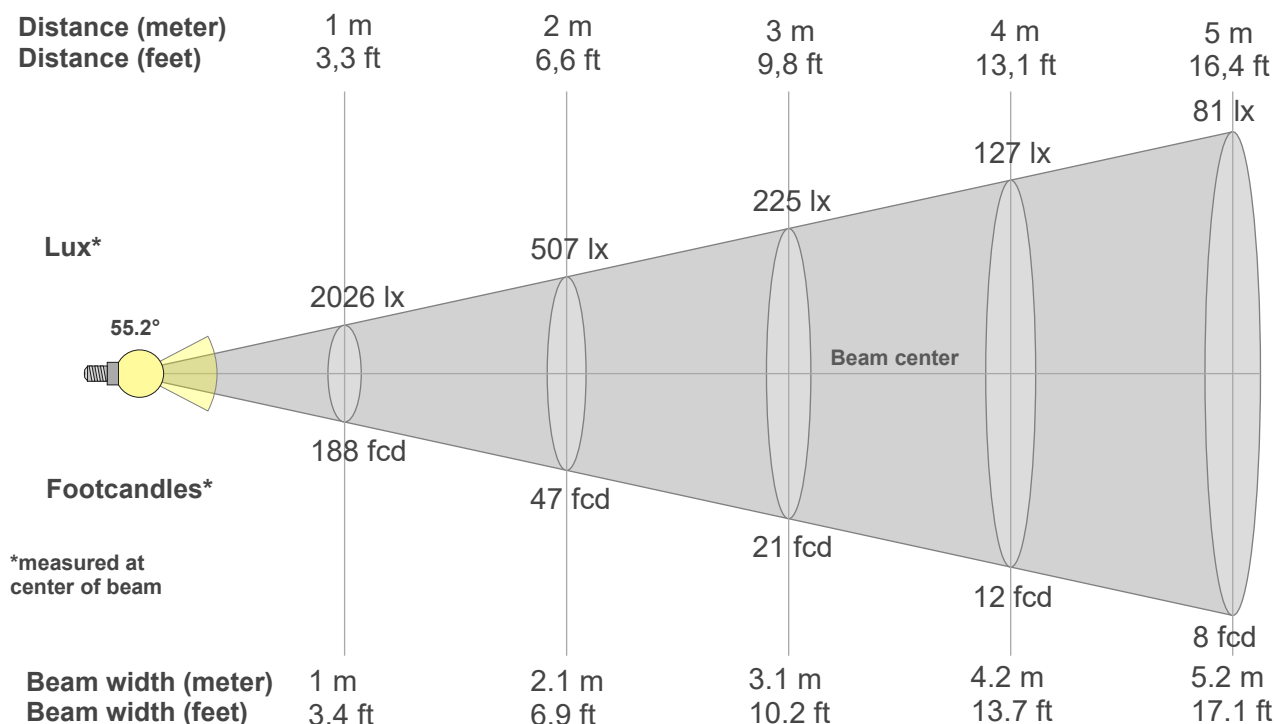

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2026lx	507lx	225lx	127lx	81lx	56lx	41lx	32lx	25lx	20lx	17lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx	5lx
188.2fcd	47.1fcd	20.9fcd	11.8fcd	7.5fcd	5.2fcd	3.8fcd	2.9fcd	2.3fcd	1.9fcd	1.6fcd	1.3fcd	1.1fcd	1fcd	0.8fcd	0.7fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2026	2024	2014	1998	1976	1948	1911	1866	1808	1724	1612	1485	1347	1187	968	731	520	366	265	189
100%	100%	99%	99%	98%	96%	94%	92%	89%	85%	80%	73%	66%	59%	48%	36%	26%	18%	13%	9%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2026	2024	2014	1998	1976	1948	1911	1866	1808	1724	1612	1485	1347	1187	968	731	520	366	265	189
100%	100%	99%	99%	98%	96%	94%	92%	89%	85%	80%	73%	66%	59%	48%	36%	26%	18%	13%	9%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2026	2024	2014	1998	1976	1948	1911	1866	1808	1724	1612	1485	1347	1187	968	731	520	366	265	189
100%	100%	99%	99%	98%	96%	94%	92%	89%	85%	80%	73%	66%	59%	48%	36%	26%	18%	13%	9%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2026	2024	2014	1998	1976	1948	1911	1866	1808	1724	1612	1485	1347	1187	968	731	520	366	265	189
100%	100%	99%	99%	98%	96%	94%	92%	89%	85%	80%	73%	66%	59%	48%	36%	26%	18%	13%	9%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
55.2°	75.2°	91.6°	99.2%	97.3%

LAMPS (number of lamps)

50

Light planning Luminaire budgetary diagram

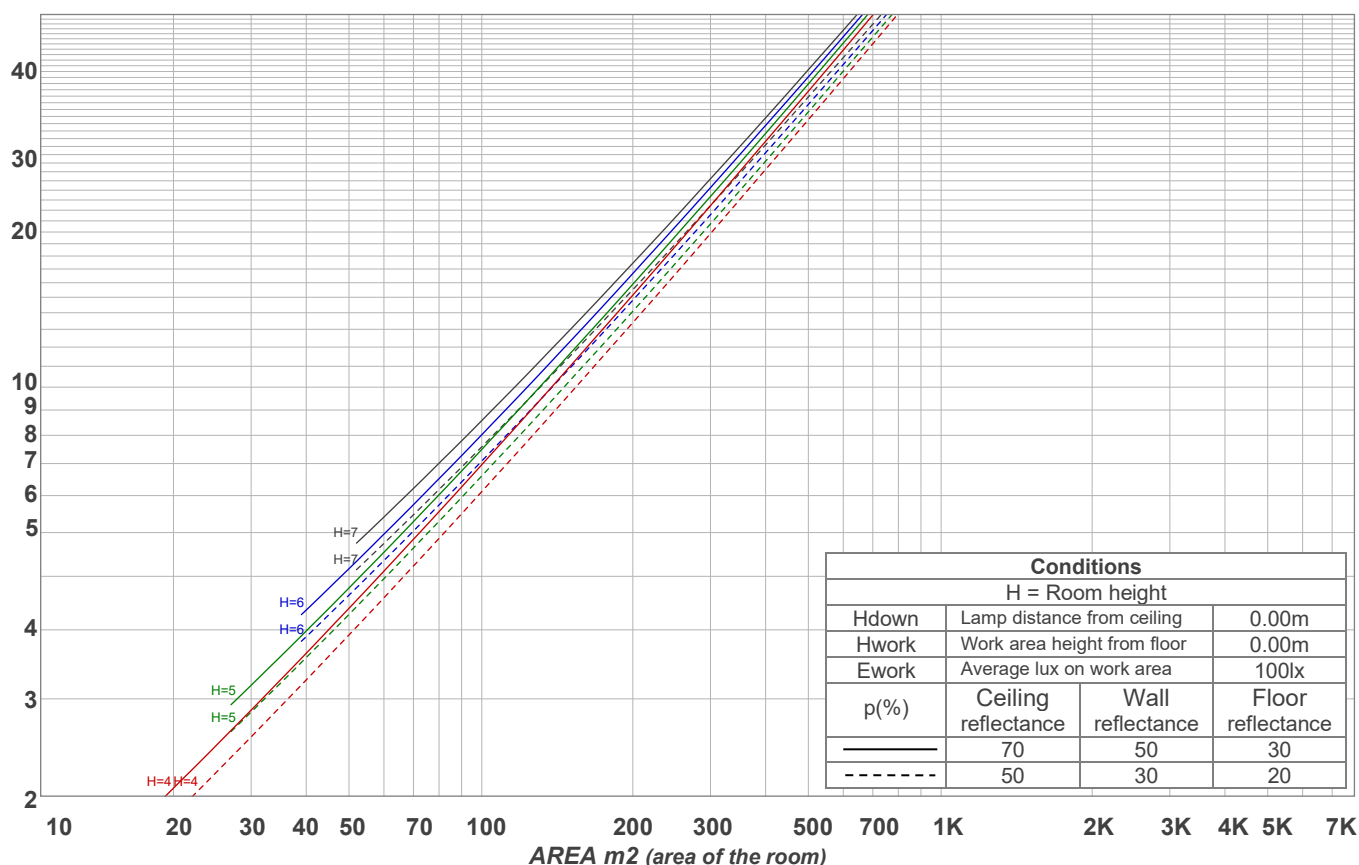

Luminaire budgetary diagram AREA m² (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	102	96	92	88	93	90	87	91	88	86	89	86	84	83
4	99	92	86	82	97	90	86	82	88	84	81	86	83	80	85	82	79	78
5	94	86	81	77	93	85	80	76	84	79	76	82	78	75	81	77	75	73
6	90	82	76	72	88	81	75	72	79	75	71	78	74	71	77	73	70	69
7	86	77	72	68	85	76	71	67	75	70	67	74	70	67	73	69	66	65
8	82	73	68	64	81	73	67	64	72	67	63	71	66	63	70	66	63	61
9	78	69	64	60	77	69	64	60	68	63	60	67	63	60	66	62	59	58
10	75	66	61	57	74	66	60	57	65	60	57	64	60	57	63	59	56	55

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
190 lm	511 lm	558 lm	212 lm	49.4 lm	13.8 lm	5.93 lm	3.85 lm	3.10 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.