

Light efficiency:



Output: 1481 lm

Light quality:




Peak: 3788 cd

Power: 22.1 W



Beam angle

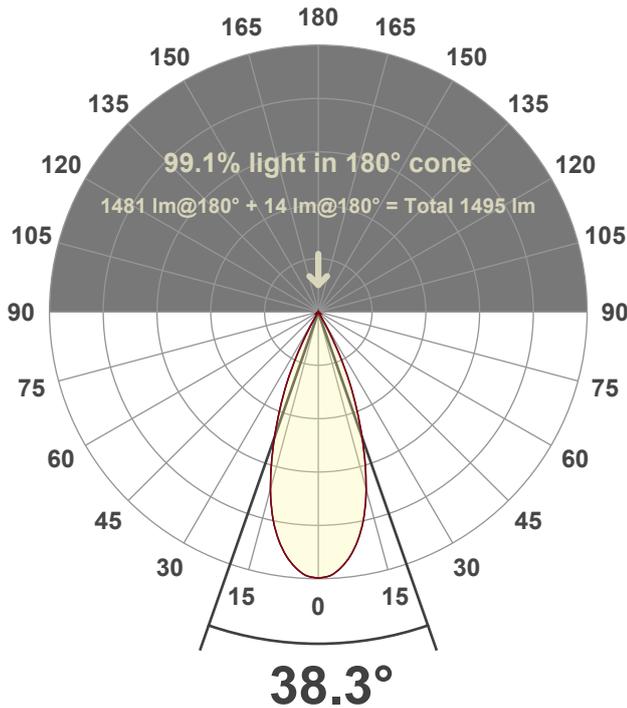

Test number:

GR-SQ-AD20-2722-FL

Luminaire Model:

Graffiti Regress Square Downlight-AD20-2722-Flood

Date and time:


2/17/2026 12:01:48 PM

LUM: 1481




*Variation due to source size, bezel geometry, or secondary optics

Spectra

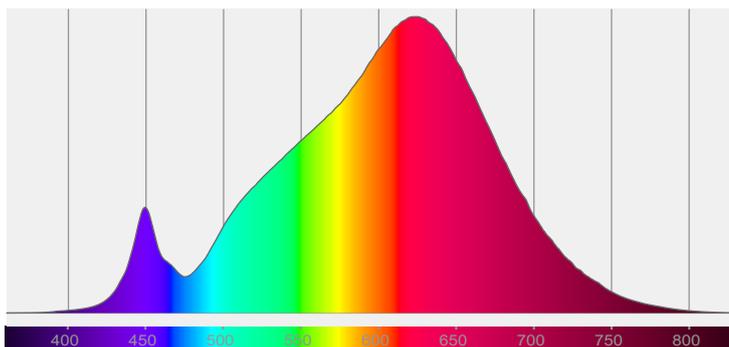

CRI: 91.3 (R1-R8)

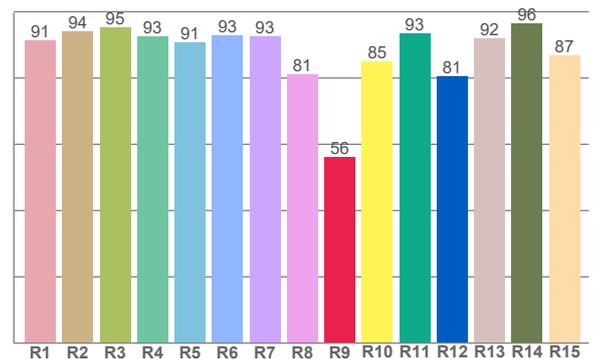

Color parameters


	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	91.3	56.1	91.1	100.3	89.4	0.462	0.415	0.262	0.353	0.0013

R_f 91.1
Fidelity index R_f


R_g 100.3
Gammut index R_g

TM30: 91.1



TM-30Color

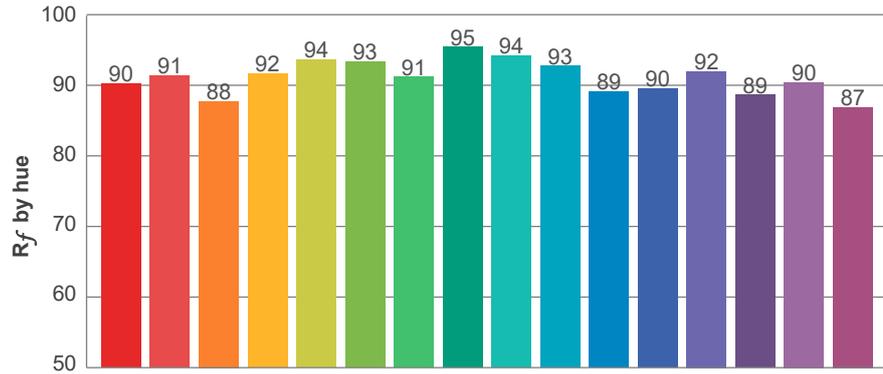



Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	-1%
2	91	-4%	3%
3	88	-1%	6%
4	92	1%	5%
5	94	4%	4%
6	93	4%	0%
7	91	1%	-6%
8	95	0%	-3%
9	94	-3%	-2%
10	93	-3%	3%
11	89	-1%	7%
12	90	4%	2%
13	92	4%	-4%
14	89	5%	-8%
15	90	0%	-6%
16	87	-3%	-10%

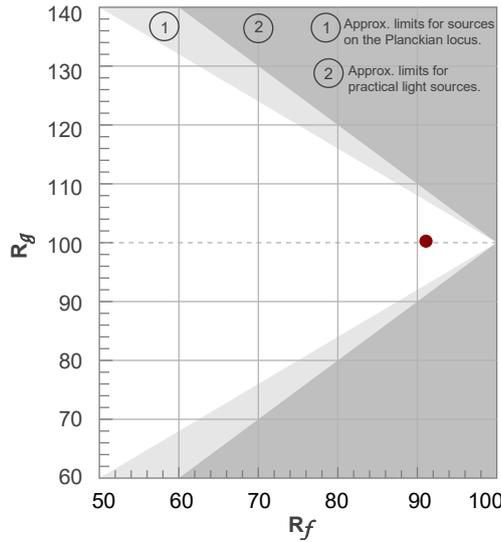


Color vector graphics

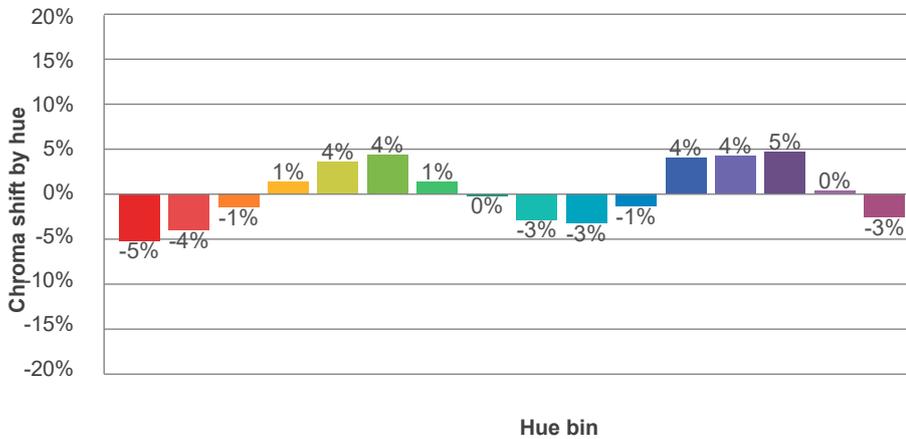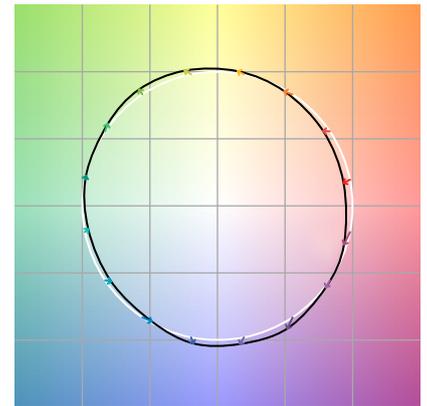

Color distortion

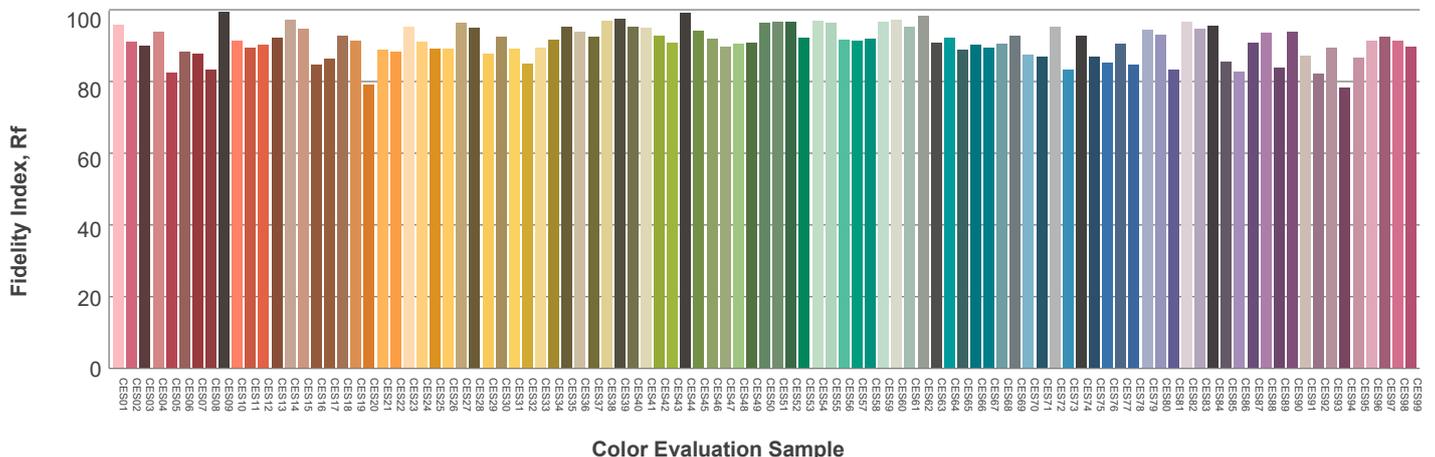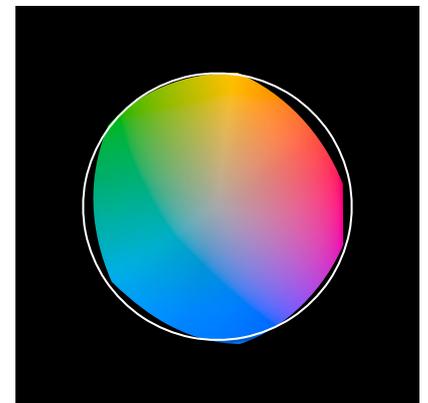

Beam details

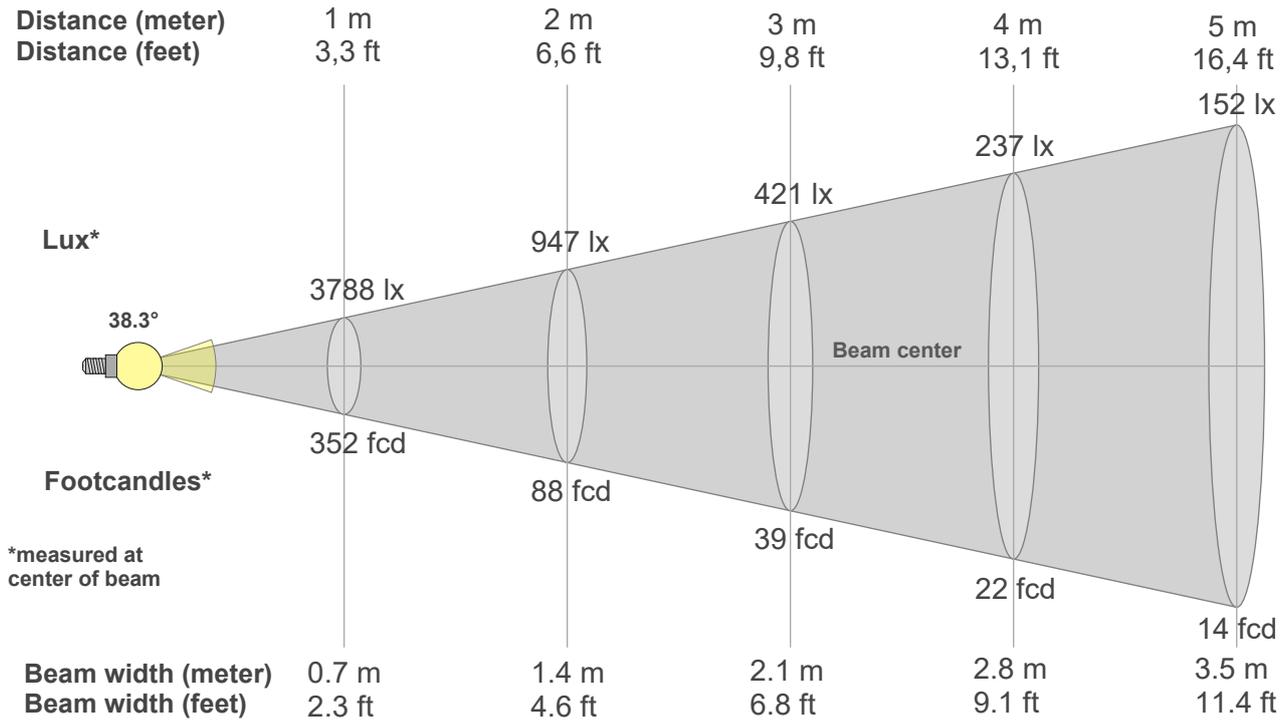

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3788lx	947lx	421lx	237lx	152lx	105lx	77lx	59lx	47lx	38lx	31lx	26lx	22lx	19lx	17lx	15lx	13lx	12lx	10lx	9lx
351.9fcd	88fcd	39.1fcd	22fcd	14.1fcd	9.8fcd	7.2fcd	5.5fcd	4.3fcd	3.5fcd	2.9fcd	2.4fcd	2.1fcd	1.8fcd	1.6fcd	1.4fcd	1.2fcd	1.1fcd	1fcd	0.9fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3788	3766	3702	3596	3455	3275	3052	2772	2446	2099	1748	1404	1075	736	432	201	69	20	11	8
100%	99%	98%	95%	91%	86%	81%	73%	65%	55%	46%	37%	28%	19%	11%	5%	2%	1%	0%	0%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3788	3766	3702	3596	3455	3275	3052	2772	2446	2099	1748	1404	1075	736	432	201	69	20	11	8
100%	99%	98%	95%	91%	86%	81%	73%	65%	55%	46%	37%	28%	19%	11%	5%	2%	1%	0%	0%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3788	3766	3702	3596	3455	3275	3052	2772	2446	2099	1748	1404	1075	736	432	201	69	20	11	8
100%	99%	98%	95%	91%	86%	81%	73%	65%	55%	46%	37%	28%	19%	11%	5%	2%	1%	0%	0%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3788	3766	3702	3596	3455	3275	3052	2772	2446	2099	1748	1404	1075	736	432	201	69	20	11	8
100%	99%	98%	95%	91%	86%	81%	73%	65%	55%	46%	37%	28%	19%	11%	5%	2%	1%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
38.3°	56.7°	62.6°	99.5%	99.2%

LAMPS (number of lamps)

50

Light planning Luminaire budgetary diagram

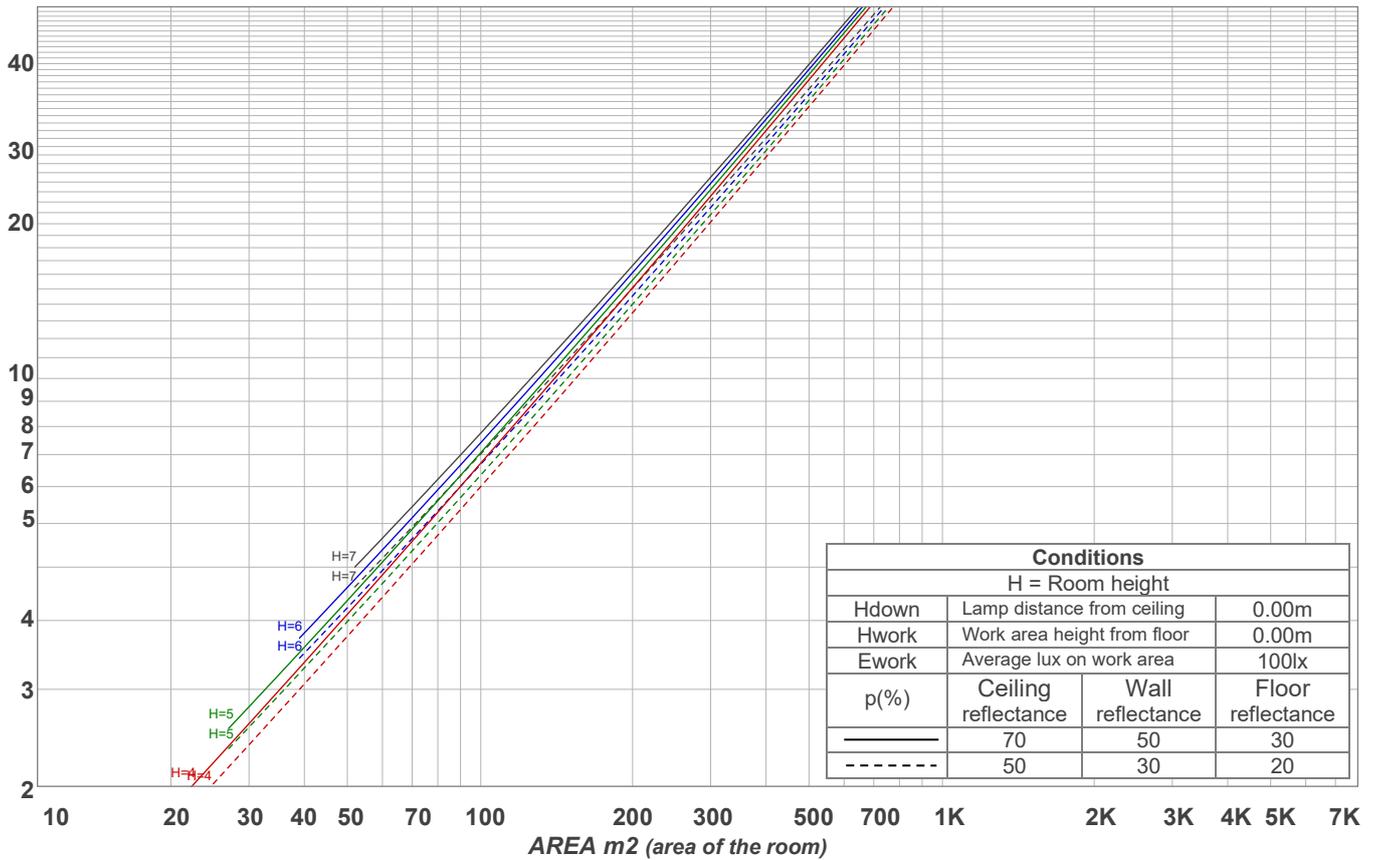

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96
2	110	107	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92
3	107	101	98	94	105	100	97	94	98	95	92	95	93	91	93	91	90	88
4	103	97	93	89	101	96	92	89	94	91	88	92	89	87	90	88	86	85
5	99	93	88	85	98	92	88	85	90	87	84	89	86	83	87	85	83	81
6	96	89	85	81	95	88	84	81	87	83	81	86	83	80	85	82	80	78
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76
8	90	83	78	75	89	82	78	75	81	77	74	80	77	74	79	76	74	73
9	87	80	75	72	86	79	75	72	78	74	72	78	74	71	77	74	71	70
10	84	77	72	69	83	76	72	69	76	72	69	75	72	69	74	71	69	68

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
337 lm	708 lm	403 lm	19.6 lm	3.56 lm	2.25 lm	2.21 lm	2.50 lm	2.93 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.