

Light efficiency:



Output: 1430 lm

Light quality:




Peak: 6069 cd

Power: 22.1 W



Beam angle

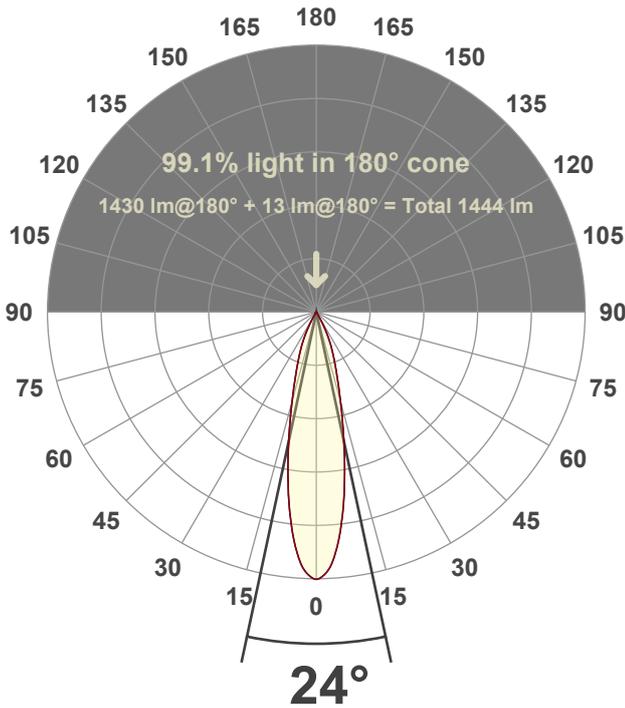

Test number:

GR-SQ-AD20-2722-NF

Luminaire Model:

Graffiti Regress Square Downlight-AD20-2722-Narrow Flood

Date and time:


2/17/2026 11:57:41 AM

LUM: 1430




*Variation due to source size, bezel geometry, or secondary optics

Spectra

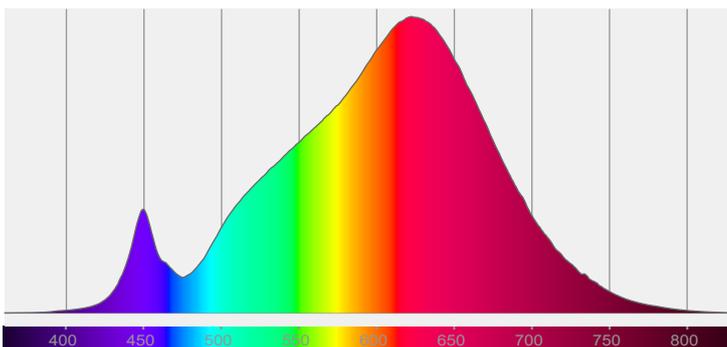

CRI: 91.3 (R1-R8)

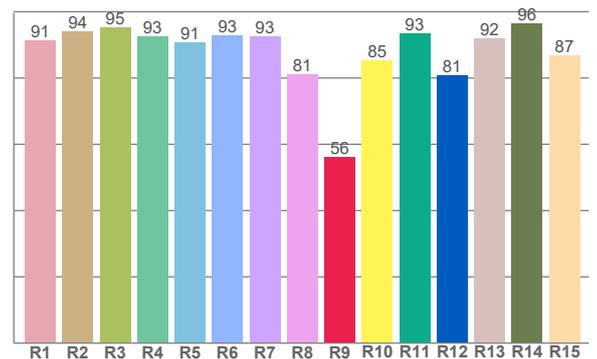

Color parameters


	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	91.3	56.2	91.1	100.3	89.4	0.463	0.415	0.263	0.353	0.0013

R_f 91.1
Fidelity index R_f


R_g 100.3
Gammut index R_g

TM30: 91.1



TM-30Color

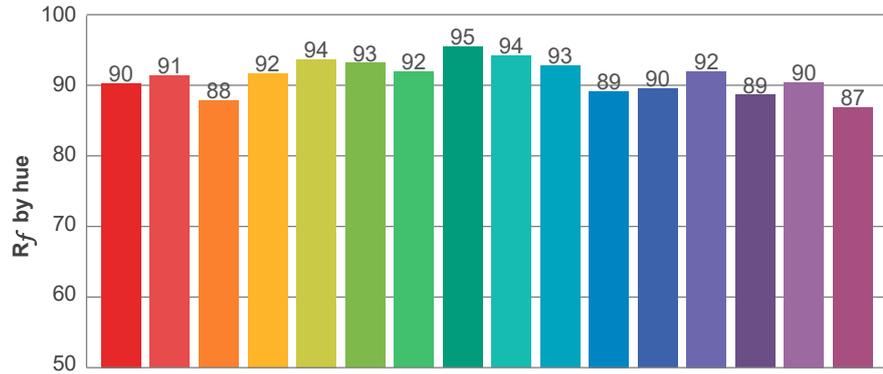



Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	-1%
2	91	-4%	3%
3	88	-1%	6%
4	92	1%	5%
5	94	4%	4%
6	93	5%	1%
7	92	2%	-5%
8	95	0%	-3%
9	94	-3%	-2%
10	93	-3%	3%
11	89	-1%	7%
12	90	4%	2%
13	92	4%	-4%
14	89	5%	-8%
15	90	0%	-6%
16	87	-3%	-10%

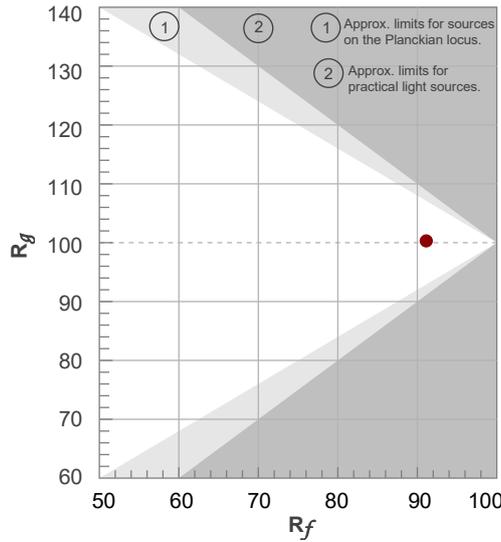


Color vector graphics

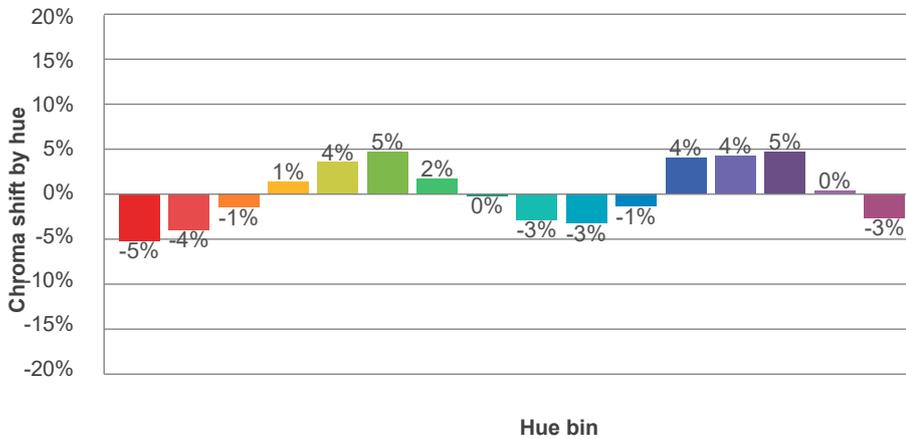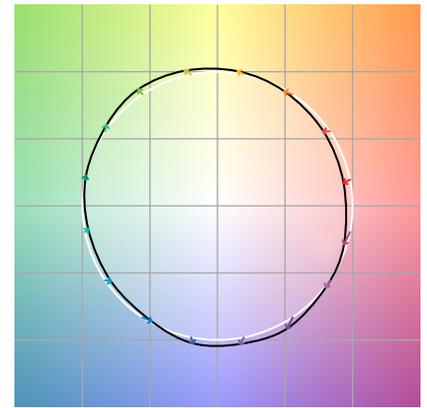

Color distortion

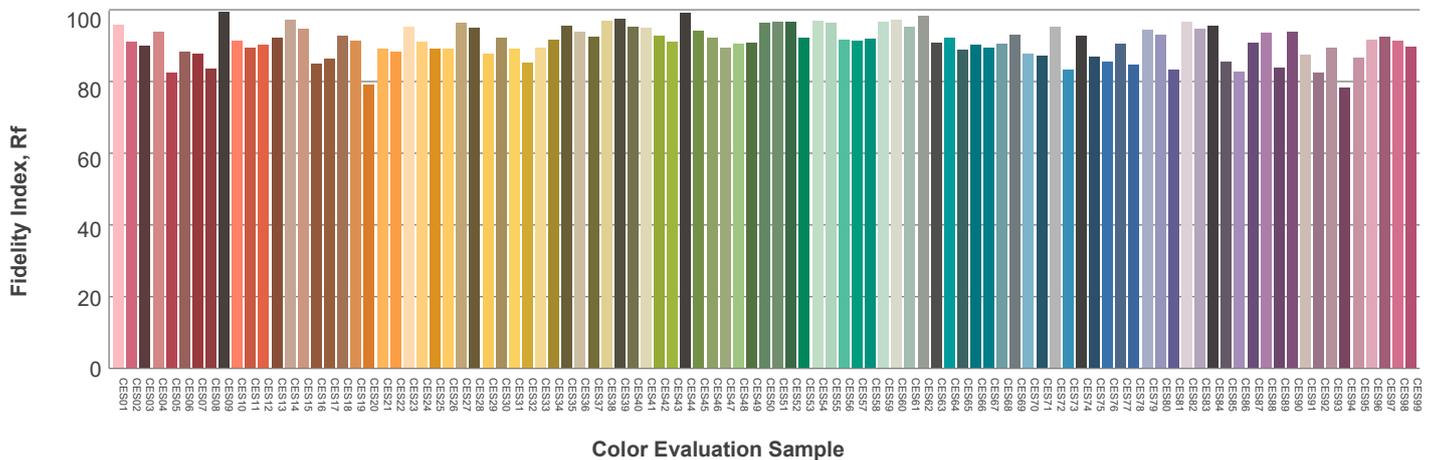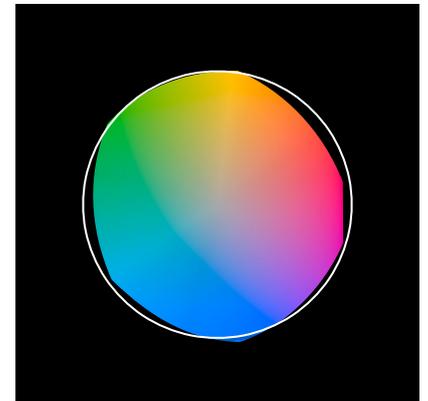

Beam details

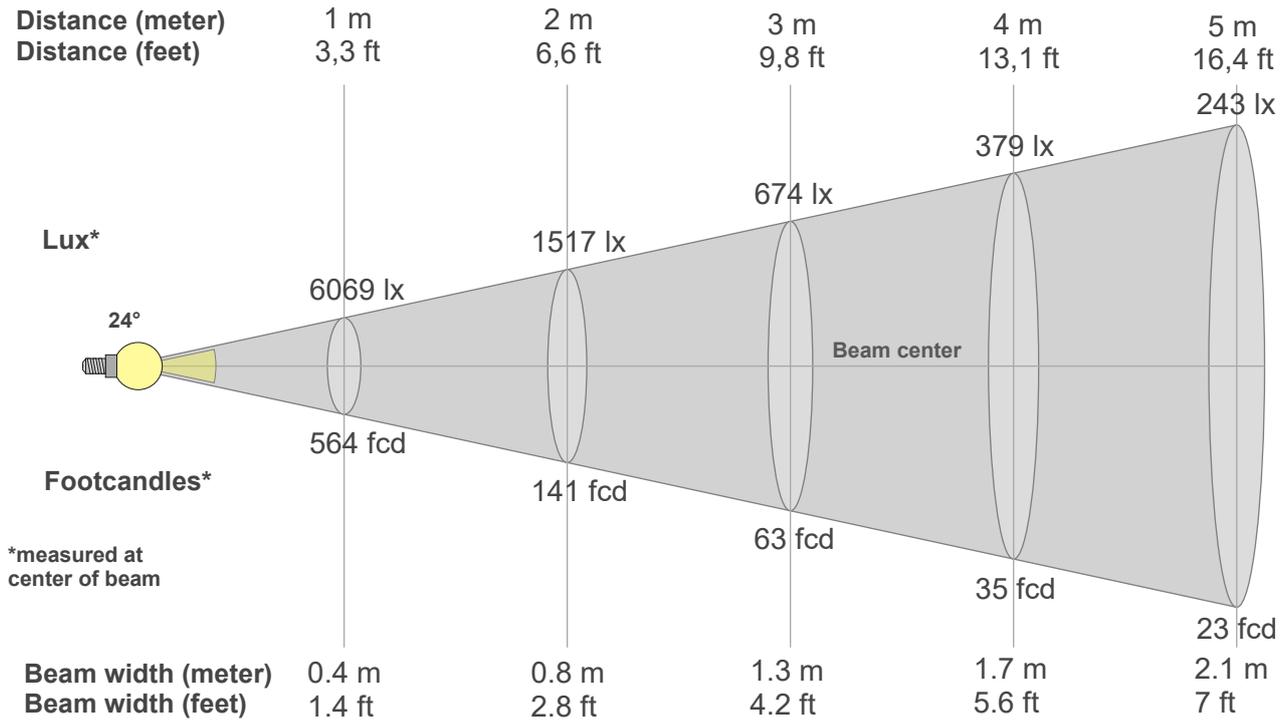

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
6069lx	1517lx	674lx	379lx	243lx	169lx	124lx	95lx	75lx	61lx	50lx	42lx	36lx	31lx	27lx	24lx	21lx	19lx	17lx	15lx
563.8fcd	141fcd	62.6fcd	35.2fcd	22.6fcd	15.7fcd	11.5fcd	8.8fcd	7fcd	5.6fcd	4.7fcd	3.9fcd	3.3fcd	2.9fcd	2.5fcd	2.2fcd	2fcd	1.7fcd	1.6fcd	1.4fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6069	5942	5617	5093	4434	3712	3027	2420	1917	1523	1224	990	779	569	367	197	87	56	43	36
100%	98%	93%	84%	73%	61%	50%	40%	32%	25%	20%	16%	13%	9%	6%	3%	1%	1%	1%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6069	5942	5617	5093	4434	3712	3027	2420	1917	1523	1224	990	779	569	367	197	87	56	43	36
100%	98%	93%	84%	73%	61%	50%	40%	32%	25%	20%	16%	13%	9%	6%	3%	1%	1%	1%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6069	5942	5617	5093	4434	3712	3027	2420	1917	1523	1224	990	779	569	367	197	87	56	43	36
100%	98%	93%	84%	73%	61%	50%	40%	32%	25%	20%	16%	13%	9%	6%	3%	1%	1%	1%	1%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
6069	5942	5617	5093	4434	3712	3027	2420	1917	1523	1224	990	779	569	367	197	87	56	43	36
100%	98%	93%	84%	73%	61%	50%	40%	32%	25%	20%	16%	13%	9%	6%	3%	1%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
24°	51.3°	61.6°	99.3%	98.4%

LAMPS (number of lamps)

50

Light planning Luminaire budgetary diagram

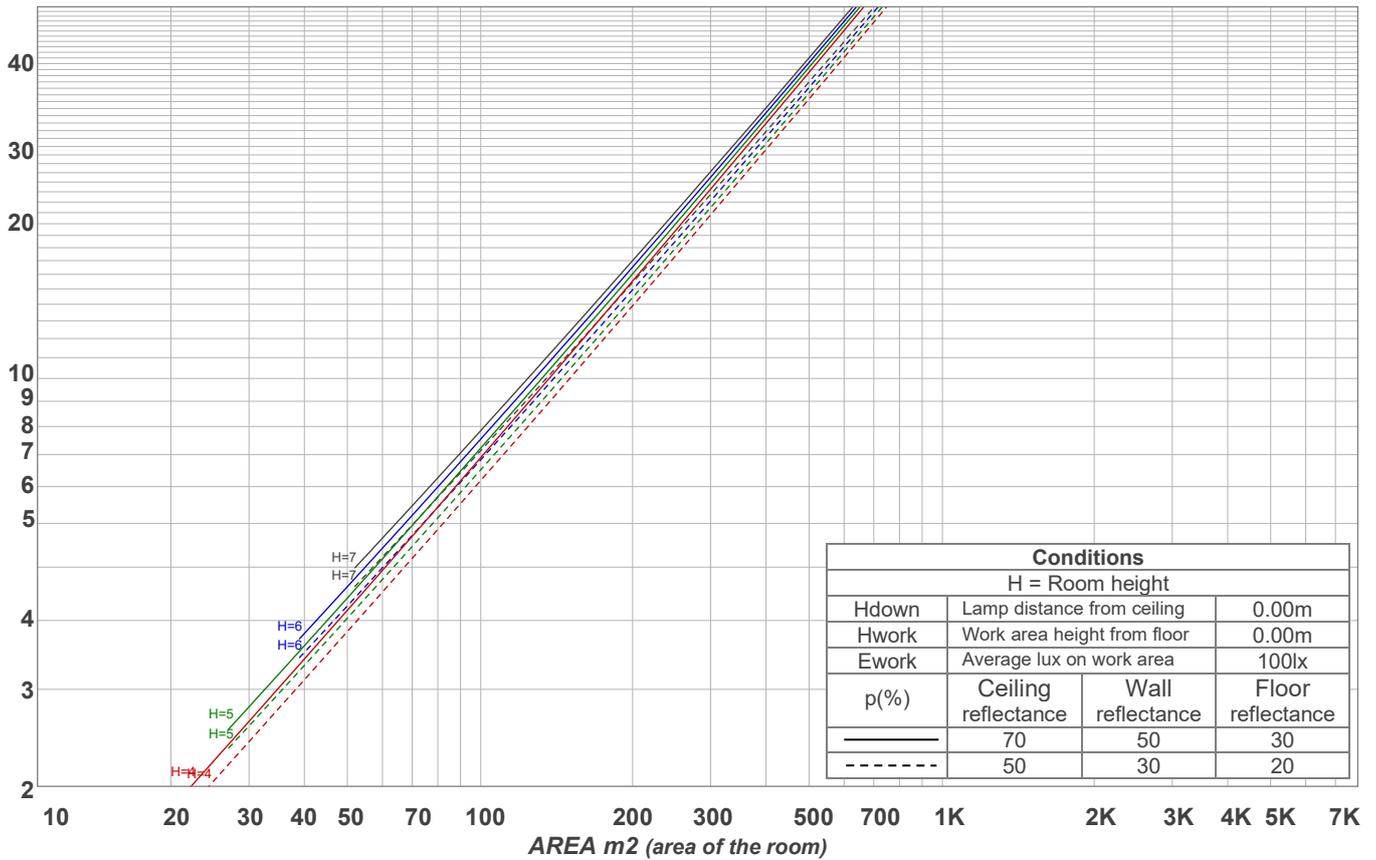

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	95	98	95	93	96	94	92	94	92	90	89
4	103	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86
5	100	94	90	87	99	93	89	86	92	88	85	90	87	85	89	86	84	83
6	97	91	86	83	96	90	86	83	89	85	82	87	84	82	86	83	81	80
7	94	87	83	80	93	87	83	80	86	82	79	85	81	79	84	81	79	78
8	91	85	80	77	90	84	80	77	83	79	77	82	79	77	81	78	76	75
9	89	82	78	75	88	81	77	75	81	77	74	80	77	74	79	76	74	73
10	86	79	75	72	86	79	75	72	78	75	72	78	74	72	77	74	72	71

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
458 lm	601 lm	300 lm	39.8 lm	14.5 lm	7.01 lm	3.93 lm	2.74 lm	3.55 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.