



## GRW-M Series

**GRAFFITI**

is the innovative new line  
of MR-16 lighting solutions from  
Specialty Lighting Industries.



**GRWM**

Series in low to medium ceiling heights typically found in residential, commercial or retail applications. GRW-M series fixtures feature a recessed conical trim that provide directional fixed lighting to walls. The Graffiti™ fixtures provide cost effective MR-16 lighting solutions. As the creative spirit of its name implies, Graffiti™ systems provide all the quality SLI has grown famous for over the last 25 years, but at reduced lead times, affordable price points and innovative technologies that will liberate your creative flair.

**Project Name:**

**Specifier:**

**Distributor:**

**Quantity:**

**Type:**

**Signature:**

### WALL WASH

#### SPECIFICATIONS

**MOUNTING** - Recessed in architectural ceiling. Butterfly brackets and Hanger bars included with housing and mounting pans.

- **IC**-Housing for new construction where insulation comes in contact with fixture
- **NIC**-Housing for new construction where IC not required
- **IH**- International Housing (Open Housing- no transformer included)
- **AH**- Airtight Housing (Non IC)
- **CP**- Chicago Plenum

**TRIM** - One piece die cast aluminum, flanged or flangeless trim with a regressed surface . Available for wet locations.

Accommodates up to 1" ceiling thickness as standard.

- **ZT**- for use in plaster/GWB ceilings
- **FT/FST**- for use in architectural ceilings

#### ELECTRICAL

- **Magnetic (TX)**
- **Electronic SORAA (EXS)** Powered by SORAA




#### LAMP

- **MR16**- 50W Max. (37W Max for IC/Airtight/CP)
- **SMRA**- Sorra Retrofit


**LENS/OPTICS** - Supertex borosilicate spread lens, hinged for relamping. Alzak kick reflector.

**FINISH** - Black powder paint housing. Aper. trim available in white as standard. Can be field painted to match ceiling finish.

**WARRANTY** - 2 year limited on MR-16 and transformer. See website for details.

**LABELS** -  , US tested to UL standards 1598, Dry/Damp and Wet listings. IC/Airtight, Chicago Plenum,  compliant, 


**ACCESSORY**-1287 Hanger Bar comes standard with IC/NIC/CP Housing\*

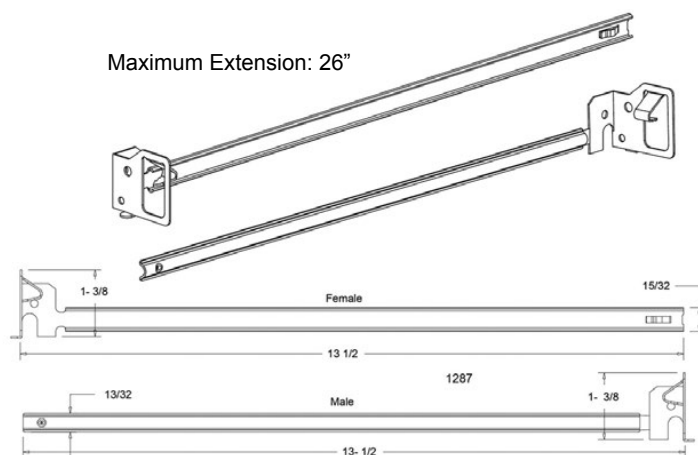

INFORMATION- TRIM



ROUND/ FLANGED






ROUND / FLANGELESS



SQUARE / FLANGED





SQUARE / FLANGELESS



INFORMATION- HOUSING

For easy installation in existing ceilings.

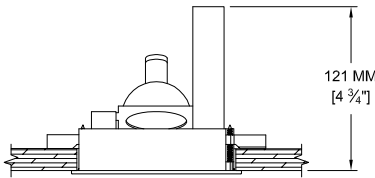

ORDER INFO

Graffiti™ Housing

CODE

GRW-M

Housing

- IC = IC
- NIC = Non IC
- IH = International Housing (Open Housing- no transformer included)
- AH = Airtight Housing (Non IC)
- CP = Chicago Plenum

Source/Wattage/Lumens/Delivered

- MR37 = MR-16 / 37W Max for IC/Airtight/CP
- MR50 = MR-16 / 50W
- GUMR = MR-16 GU10
- SMRA = SORAA Retrofit

Type

WW = Wall Wash

Transformer

- TX = Magnetic
- EXS= Electronic SORAA
- GX= GU10 Socket\*
- \*GU10 requires 120V

Voltage

- 120V
- 277V

Graffiti™ Trim

GRWT-M

Shape

- RD = Round
- SQ = Square

Trim

- FT = Flanged
- ZT = Flangeless
- FST\* = Flanged Shower

\*Lens Required

Finish



WHT

WHT = White

Lens



82A = Frosted Supertex

\* CLICK HERE to view Accessories for Trims.

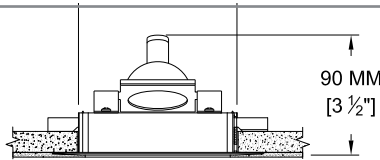



\*For projects requiring housings or IC rated fixtures. IC and CP housings will have no vents.

NIC / FT / RD

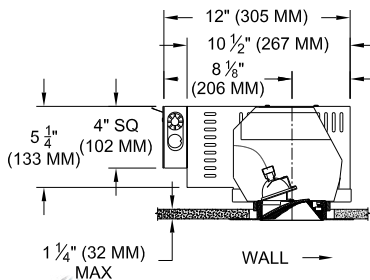

NIC / FT / SQ

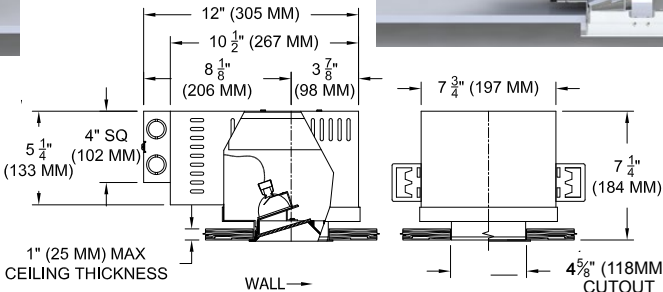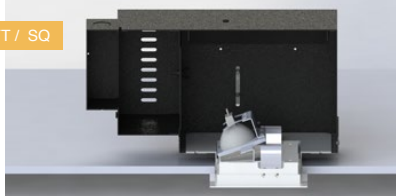

Patent Pending. These specifications subject to change without notice. 11/19